


- prosystemitalia.com

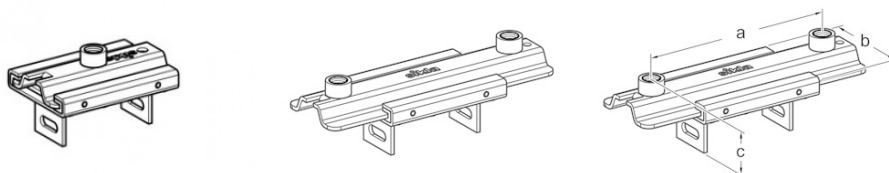

## Application

Slide Set in solid construction for installation on top of siFramo Beam Sections TP F. 1/2" thread connection allows direct connection to pipe clamp Stabil I -1/2" by means of threaded tube without further adaption parts.


## Installation

Installation on top of Beam Section TP F with two Self Forming Screws FLS F.

## Technical Data

Type	a [mm]	b [mm]	c [mm]	perm. load support [kN]	perm. load suspended [kN]
GS F 80 1G	-	102	80.5	17.0	5.4
GS F 80 1G2	210	102	80.5	12.0	8.4

The perm. loads have been determined by load tests following DIN EN 13480-3 annex J.  
The pipe clamp and the possibly used 1/2" threaded tube have to be verified separately.

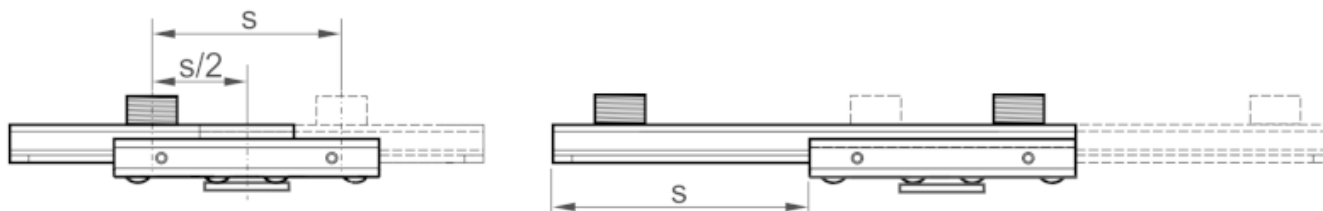

Type	max. lever [mm]	max. glide path s [mm]
GS F 80 1G	200	100
GS F 80 1G2	300	135

Temperature range (permanent exposure):

130°C

Static friction coefficient $\mu_0$ :	0,20
Sliding friction coefficient $\mu$ :	0,15

Material:	
Metal components:	Steel, HCP
Slide bar:	Polyamide, glass fibre reinforced

Tipo	Kg	Pezzi per confezione	Codice Articolo
	0.98	1	113886
	0.98	1	113885