


DUCTING STRAP LUB - prosystemitalia.com

DUCTING STRAP LUB - Group 1603

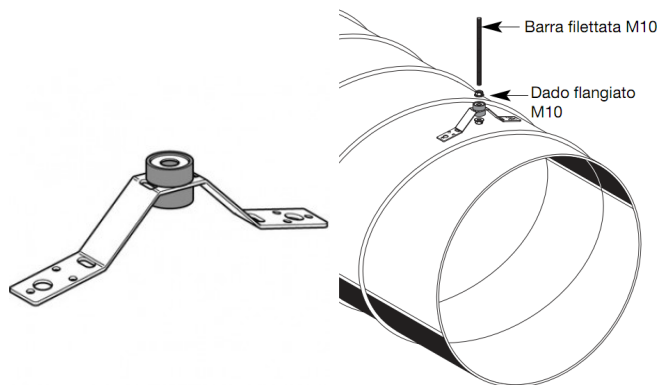

Application

For quick and safe soundproof mounting of ducts either close to a ceiling, or for suspended installation when using a threaded rod. The bending points are punched, ensuring easy and exact adjustment to the pipe diameter.

Suitable if soundproof installation according to DIN 4109 is demanded.

Scope of delivery

Sound absorption component with carrying bracket and distance bush pre-assembled.

Installation

The use of 2 x 3 blind steel rivets of 4 mm is recommended.

Technical Data

Max. Working Load: 0.3 kN

Material: Steel strap (25 x 2.5 mm) cold-worked, pre-galvanised according to DIN EN 10346.

Tipo	Kg	Pezzi per confezione	Codice Articolo
LUB Ø 10,5	0.1	100	151582