


PERFORATED STRAP - prosystemitalia.com

PERFORATED STRAP - Group 1129

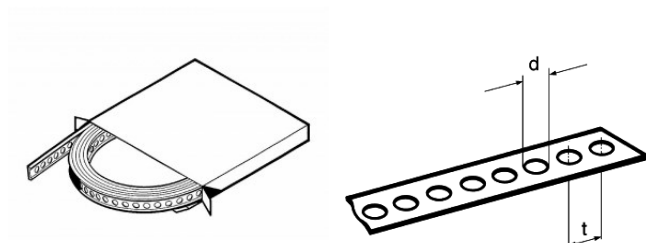

Application

For suspension of pipes, without precise dimensions. For installations without special mounting requirements. The plastic type is particularly suitable for damp locations and for the support of copper pipes.

Technical data

Max adm. load:

- 17 mm: 0,5 kN

- 19 mm: 0,5 kN

Working temperature:

- Galvanized type: up to + 250°C

- Plasticized type: - 40°C up to + 95°C

Tipo	Kg	Pezzi per confezione	Codice Articolo
17×6,4 mm zincata	0.89	1	120874
26×1,0 mm zincata	1.8	1	120883
19×7,0 mm plastificata	0.97	1	121015