


SOUND ABSORPTION UNIT SDE - prosystemitalia.com

SOUND ABSORPTION UNIT SDE - Group 2712

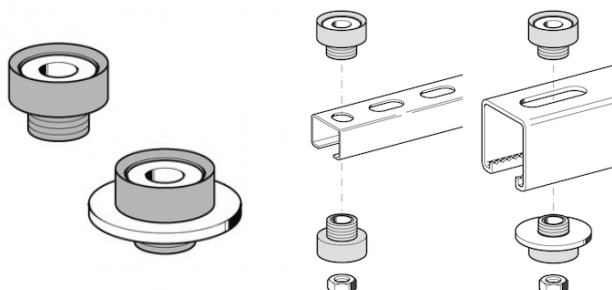

Application

Sound absorption element to be used in combination with Sikla Channels 27 in ducting systems (respecting sound proof demands according to DIN 4109).

The geometry of this element reliably secures sound absorption between channel and suspension.

Scope of delivery

Completely assembled with inserted and retained washer.

Installation

Clamp the sound absorption element into the round hole of the channel back and into the channel opening. Thread to be pulled through and contered afterwards.

Technical Data

Material: TPE, black

Temperature range: -50°C to + 110°C

Fire resistance: B2 according to DIN 4102, non-dripping

Hardness: 50°+/-5° Shore

Type	For channel	Thread connection	Total-Height [mm]	Height of collar [mm]
------	-------------	-------------------	-------------------	-----------------------

27		M8	15	7
41	41	M8/M10	18	10

Tipo	Kg	Pezzi per confezione	Codice Articolo
Tipo 27	0.01	50	197973
Tipo 41	0.01	100	107802