


CLAMPING END SKL - [prosystemitalia.com](http://prosystemitalia.com)

## CLAMPING END SKL - Group 1350

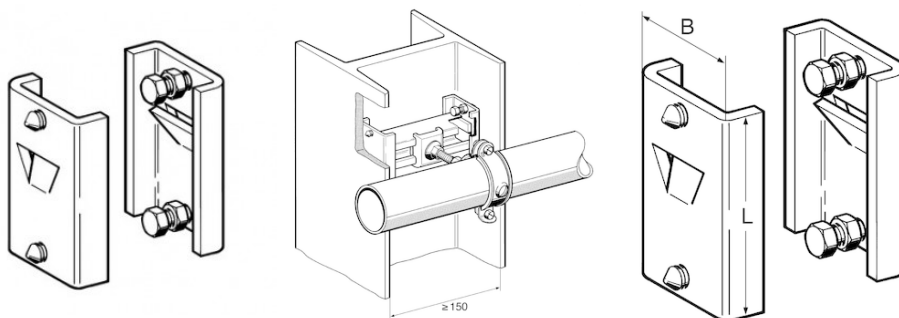

### Application

Mounting element to be fixed within the flanges of I- and U-shaped beams. The systems (such as pipes, etc.) supported this way may run parallel or at right angles to the direction of the I or U beam.

Also suitable as support for crossbars between two vertically adverse arranged profiles.

### Scope of delivery

Pre-assembled.

### Installation

The tightening moment of the clamping bolts must be between 1 (minimum) and 1 1/2 (maximum) turns; then tighten locking nuts.

Note: The length of the channel to be cut : inside diameter of beam less 25 mm

### Technical Data

Permissible load per set: Crossbar support: (2 sets) 5.0 kN/crossbar

Single attachment: (1 set) 2.5 kN

The maximal torsional moment of the channel is to be taken into consideration.

Material: Cold-worked steel, electro-galvanised.

Dimensions:

- L: 100 mm

- B: 62 mm

Minimum beam type: IP 140. U 200

Tipo	Kg	Pezzi per confezione	Codice Articolo
SKL	0.84	5	145671