


SLIDE ELEMENT GLE J - prosystemitalia.com

## SLIDE ELEMENT GLE J - Group 1343

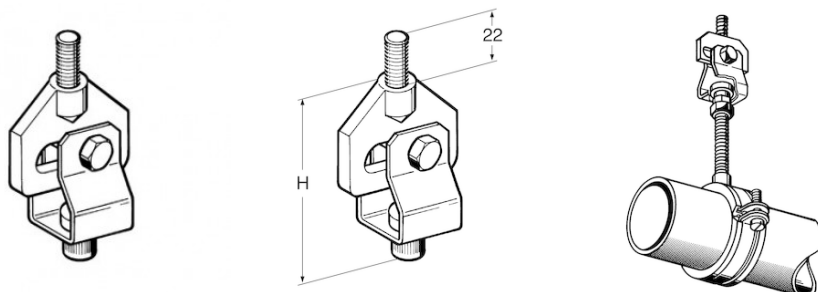

### Application

Height-adjustable suspension slide element for all mechanical services.

Can be fixed as a single mounting element directly to the ceiling or, in case of parallel pipe runs, to Channels.

The slide roller located in the suspended section provides for smooth, jerk-free and silent sliding.

### Scope of delivery

Completely pre-assembled.

### Installation

The selected height is to be secured by means of a locking nut.

### Technical Data

Type	FZ * [kN]
J 8	3.5 kN
J 10	3.5 kN
J 12	6.0 kN
J 16	6.0 kN

Adm. load FZ \* under stress of fire

Type	FWD 30 [N]	FWD 60 [N]	FWD 90 [N]	FWD 120 [N]
J10	≤ 1.100	≤ 600	≤ 400	≤ 300

FZ = max. adm. tensile load

\* The load capacity of the connecting elements used is to be respected, this applies in particular under stress of fire.

Maximum lateral deviation angle: 10°

Length of drop rod of threaded rod: no limitation

Maximum sliding distance: 25 mm

Maximum height adjustment: 15 mm

Static friction coefficient  $\mu_0$ : 0,23

Sliding friction coefficient  $\mu$ : 0,15

Material: Steel/ cast iron, electro-galvanised.

Type	Thread connection	Anchor size	Height H [mm]
J 8	M8	M8	85
J 10	M10	M10	85
J 12	M12	M12	95
J 16	M16	M12	95

Tipo	Kg	Pezzi per confezione	Codice Articolo
J 8	0.19	25	126852
J 10	0.19	25	126861
J 12	0.29	25	126870
J 16	0.27	25	126889