


STABIL D SS - prosystemitalia.com

STABIL D SS - Group 1739

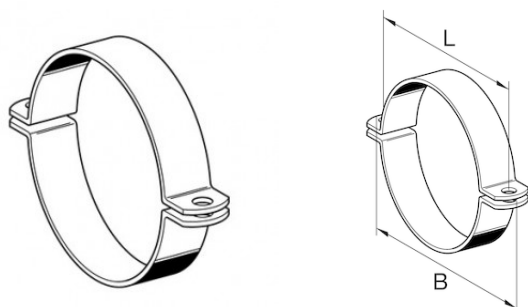

Application

For the installation of pipes required for all M&E services in industrial, residential and public buildings.

Scope of delivery

Two-piece pipe clamp without clamping bolts and nuts.

Installation

Particularly suitable for two-point mountings.

Technical Data

Material: Stainless steel V4A

Size range [mm]	Max. perm. working load [kN]	Material W x th [mm]	Recommended clamping bolts	B [mm]	L [mm]
18 - 22	5.0	25 x 3	M8 x 25	70	50
24 - 28	5.0	25 x 3	M8 x 25	77	57
30 - 34	5.0	25 x 3	M8 x 25	84	64
35 - 37	5.0	25 x 3	M8 x 25	87	67
40 - 44	5.0	25 x 3	M8 x 25	95	75
47 - 51	5.0	25 x 3	M8 x 25	102	82
54 - 58	5.0	25 x 3	M8 x 25	109	89
59 - 63	5.0	25 x 3	M8 x 25	115	95
67 - 71	5.0	25 x 3	M8 x 25	123	103

74 - 78	6.0	30 x 3	M10 x 30	140	116
81 - 85	6.0	30 x 3	M10 x 30	147	123
86 - 90	6.0	30 x 3	M10 x 30	152	128
94 - 98	6.0	30 x 3	M10 x 30	160	136
102 - 108	6.0	30 x 3	M10 x 30	170	146
108 - 114	6.0	30 x 3	M10 x 30	176	152
116 - 122	6.0	30 x 3	M10 x 30	184	160
133 - 140	6.0	40 x 4	M12 x 35	217	184
145 - 152	6.0	40 x 4	M12 x 35	229	196
159 - 169	6.0	40 x 4	M12 x 35	245	212
170 - 180	6.0	40 x 4	M12 x 35	257	224
198 - 207	6.0	40 x 4	M12 x 35	284	251
210 - 219	6.0	40 x 4	M16 x 50	304	269
222 - 231	6.0	40 x 4	M16 x 50	316	281
247 - 253	6.0	40 x 4	M16 x 50	338	303
271 - 277	6.0	40 x 4	M16 x 50	362	327
312 - 318	6.0	40 x 4	M16 x 50	403	368
322 - 329	6.0	40 x 4	M16 x 50	414	379

Tipo	Kg	Pezzi per confezione	Codice Articolo
18 - 22 mm ½"	0.08	50	172433
24 - 28 mm ¾"	0.09	50	172442
30 - 34 mm 1"	0.1	50	172451
35 - 37 mm	0.11	50	172460
40 - 44 mm 1 ¼"	0.12	50	172469
47 - 51 mm 1 ½"	0.13	50	172478
54 - 58 mm	0.14	50	172487
59 - 63 mm 2"	0.15	50	172496
67 - 71 mm	0.16	50	173081
74 - 78 mm 2 ½"	0.23	25	172505
81 - 85 mm	0.25	25	173090
86 - 90 mm 3"	0.26	25	172514
94 - 98 mm	0.28	25	173099
102 - 108 mm	0.3	25	173144
108 - 114 mm 4"	0.3	25	172523
116 - 122 mm	0.31	25	173108
133 - 140 mm 5"	0.68	10	172532
145 - 152 mm	0.71	10	173117
159 - 169 mm 6"	0.75	10	172541
170 - 180 mm	0.83	10	173126
198 - 207 mm	0.94	10	172550
210 - 219 mm 8"	0.99	10	172559
222 - 231 mm	1.04	10	173135