


SPEED NUT NT CC 41 SS - prosystemitalia.com

## SPEED NUT NT CC 41 SS - Group 1714C

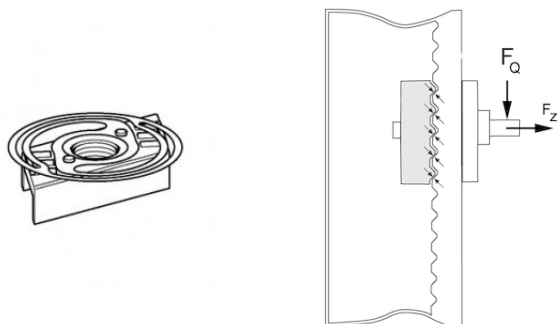

### Application

In particular useful when installing in vertical channels or in places of difficult access.

Further advantages:

- For all Channels of type 41, independent of the height of the channel;
- No getting stuck on bolt heads when sliding in the channel;
- No appearance of settlement after tightening.

### Scope of delivery

Channel Nut and Spring are tightly connected.

### Installation

After inserting the Speed Nut into the channel opening, it is - by exerting slight pressure on it - turned to the right as far as it will go; deinstallation may be effected by following the instructions in reverse order.

Installation and deinstallation do not require tools and may be repeated several times.

### Technical Data

	M6	M8	M10
Tightening torque [Nm]	10	25	40

Material thickness channel [mm]	M6 FZ ≤ [kN]	M8 FZ ≤ [kN]	M10 FZ ≤ [kN]	M6 FQ ≤ [kN]	M8 FQ ≤ [kN]	M10 FQ ≤ [kN]
2.0	3.2	5.8	5.8	0.9	2.1	3.4
2.5	3.2	5.8	5.8	1.0	2.6	4.1

Note: The admissible load capacities of the channels are to be taken into account.

Material:

- Nut: Stainless steel 316 (A4);
- Spring: Sheet metal spring steel, rustproof.

Tipo	Kg	Pezzi per confezione	Codice Articolo
CC 41-M 6 A4	0.03	50	199299
CC 41-M 8 A4	0.03	50	199305
CC 41-M10 A4	0.03	50	199312