


MOUNTING PLATE GPL SS - prosystemitalia.com

MOUNTING PLATE GPL SS - Group 1727

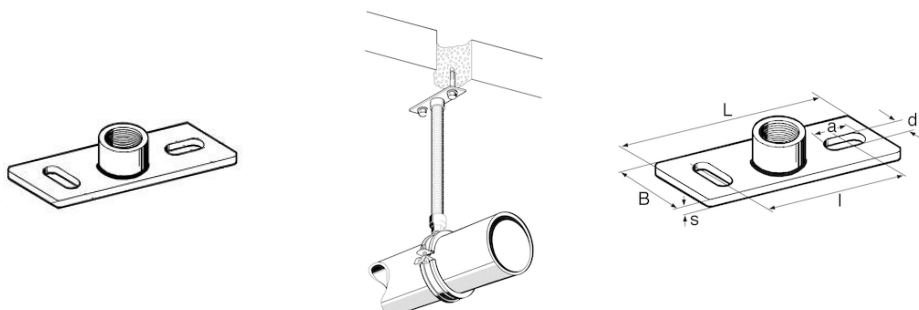

Application

For wall, ceiling and floor installation for mounting elements in M&E services.

Technical Data

The nominal loads mentioned shouldn't be exceeded. Permissible anchor values may restrict the application.

Versione/ Tipo	Max carico di sicurezza [kN]	Max momento flettente* [Nm]	Braccio massimo L _{max} [mm]	Dimension L x W x Th [mm]	Elongated hole d x a[mm]	Centre distance I
Stabil M8	3.0	8.8	150	120 x 40 x 4	11 x 25	80
Stabil M10	3.0	17.2	200	120 x 40 x 4	11 x 25	80
Stabil M12	3.0	29.6	300	120 x 40 x 4	11 x 25	80
Stabil M16	4.5	70.3	300	120 x 40 x 4	11 x 25	80
Stabil R 1/2"	4.5	95.0	350	120 x 40 x 4	11 x 25	80
Stabil R 3/4"	6.2	180.0	450	120 x 40 x 4	11 x 25	80

*Limitation caused by the Mounting Plate or the loading capacity of the grub screw or of the threaded tube.

$\sigma_{perm} \leq 160 \text{ N/mm}^2$ $f_{perm} < 5 \text{ mm}$

Material:Stainless steel A4

Tipo	Kg	Pezzi per confezione	Codice Articolo
M 8 A4	0.14	50	107608
M10 A4	0.14	50	107617
M12 A4	0.14	50	107626
M16 A4	0.16	50	107635
1/2" A4	0.16	50	107644
3/4" A4	0.17	50	107653