


BEAM BRACKET TKO F 100 - prosystemitalia.com

BEAM BRACKET TKO F 100 - Group A823

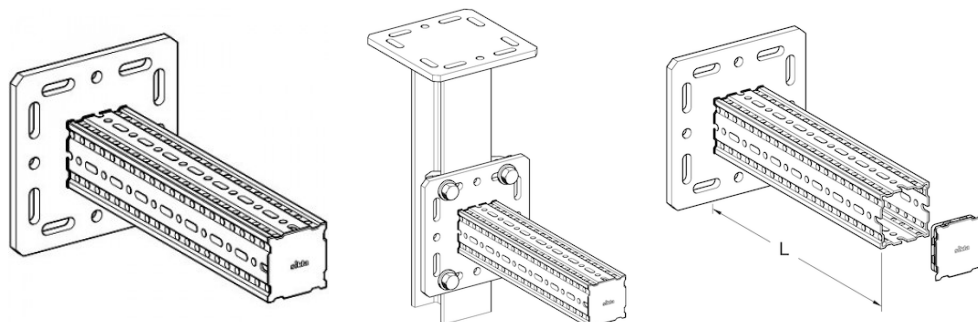

Application

Galvanised hollow-box-section with welded end-plate to serve as cantilever arm. May be used as a crossbar when combined with End Support STA/End Support WBD and 4 x Self Forming Screw FLS.

Scope of delivery

With pre-assembled End Cap ADK F100

Installation

Depending on the situation, different options are recommended:

- a) Directly to building structure: 4x suitable wall anchors;
- b) To traditional steel beams between 80 - 120 mm flange dimensions: with Assembly Set 5P M12 S.;
- c) To traditional steel beams > 120 mm flange dimension: with on-demand Adaptor Plate (tbc);
- d) To Steel Beams 100/120: with Bracket Plates FV 100/120 when positive mechanical connection required.

Technical Data

Type	L [mm]	Dimensions of base plate [mm]	Slots in base plate for
TKO F 100-400	400	220 x 220 x 12	M12
TKO F 100-800	800	220 x 220 x 12	M12
TKO F 100-1200	1200	220 x 220 x 12	M12

Configuration: Base plate welded to Beam Section TP F 100

Material:

- Plate: Steel, HCP;
- Beam section: Steel, HCP.

Approvals

CE mark, according to EN 1090.



Tipo	Kg	Pezzi per confezione	Codice Articolo
TKO F 100 L= 400mm	8.62	1	113071
TKO F 100 L= 800mm	12.78	1	113072
TKO F 100 L=1200mm	17.5	1	113421