


FLEXCON SOLAR PN8 - prosystemitalia.com

FLEXCON SOLAR PN8 - Group 2025D

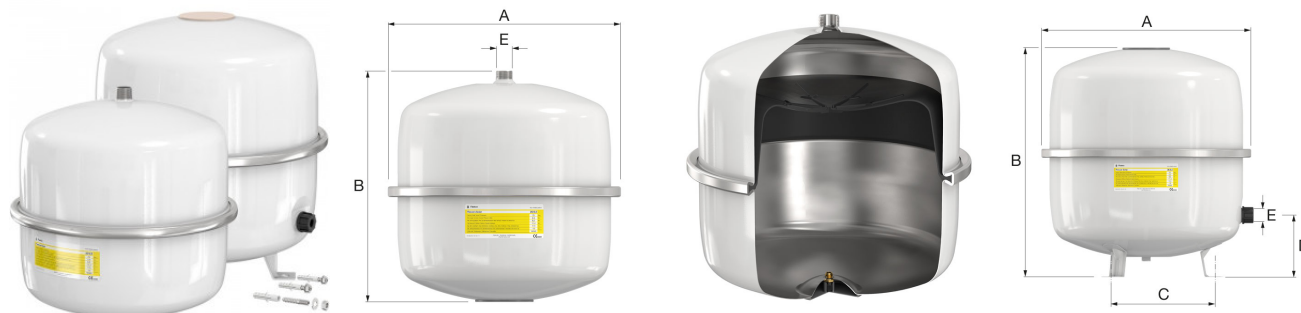

Technical Specifications

Maximum working pressure: 8.0 bar.

Vessels in accordance with EN13831.

Suitable for systems with a maximum flow temperature of 120 °C.

Maximum temperature diaphragm: 110 °C.

Diaphragm: butyl rubber.

In accordance with Pressure Equipment Directive 2014/68/EU.

Deep drawn steel vessel halves with zinc plated steel clench ring.

Suitable for addition of glycol-based anti-freeze up to 50%.

White (RAL 9010) epoxy powder coating.

Flexcon Solar 35 - 80: With feet and including mounting kit.

Warranty 5 year.

Type	Capacity [litri]	Precharge [bar]	Ø [mm]	H [mm]	Connection (M)
Flexcon Solar 8	8	2,5	245	280	3/4"
Flexcon Solar 12	12	2,5	286	313	3/4"
Flexcon Solar 18	18	2,5	328	306	3/4"
Flexcon Solar 25	25	2,5	358	359	3/4"
Flexcon Solar 35	35	2,5	396	416	3/4"
Flexcon Solar 50	50	2,5	435	473	3/4"
Flexcon Solar 80	80	2,5	519	540	1"

Tipo	Kg	Pezzi per confezione	Codice Articolo
8 L	4.5	50	16060
12 L	4.8	36	16061
18 L	5.9	24	16062
25 L	7.3	18	16063

Tipo	Kg	Pezzi per confezione	Codice Articolo
35 L	9.5	18	16064
50 L	12.1	12	16065
80 L	16.5	12	16066