


FLAT PLATES K

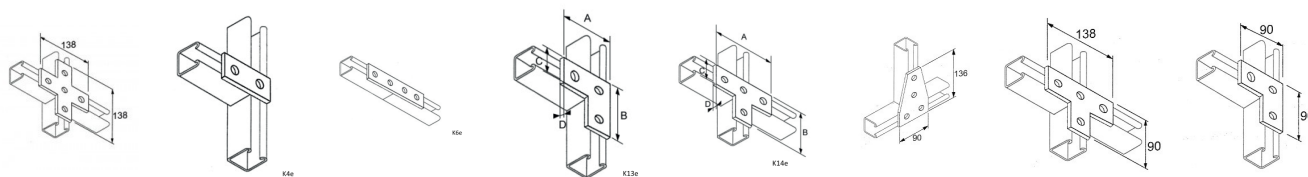

APPLICATION

Employees for the construction of self-supporting structures.

MOUNTING

The plates must be connected to the profile 41 using hammer nuts M10 or M12 and bolts M10 x 30 or M12 x 30. Be careful to choose profiles based on the loads to be supported.

TECHNICAL DATA

Thickness: 6 mm
Hole diameter: \varnothing 13.5 mm
Distance between hole and end: 20 mm
Distance between two following holes: 48 mm
Width: 41 mm

Material: electro-galvanized steel

Codice	Nome	Peso	Numero di pezzi
163347E		0.1	100
163347	K4 2 fori	0.11	100
138065	K5 3 fori	0.24	25
138066	K6 4 fori	0.33	25
138077	K17 5 fori	0.4	25
138067	K13 a "L"	0.26	25

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com

Codice	Nome	Peso	Numero di pezzi
138071	K14 a "T"	0.35	25
138072	K15 a trapezio	0.46	25

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com