


SLIDE SET GS F 100 2G

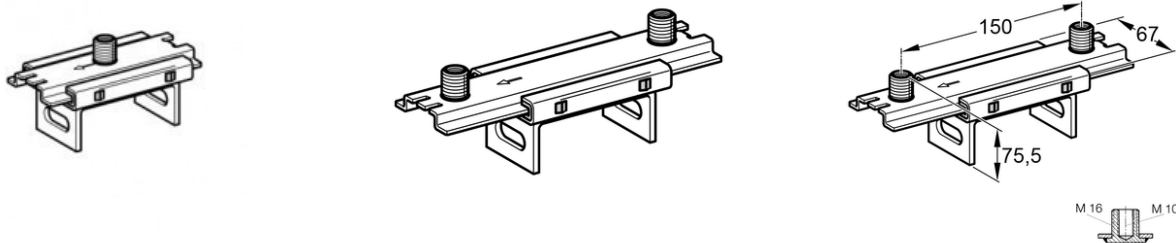

APPLICATION

Pipe guide for twin-clamp connection designed to clutch the Beam Section F100 fixed by 2 x Self Forming Screws FLS.

INSTALLATION

Pipe clamp connection points "2G" receive M10 studs or M16 by adapter connection.

TECHNICAL DATA


Type	a[mm]	b[mm]	c[mm]
GS F 100 2G2	150	67	75,5

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com

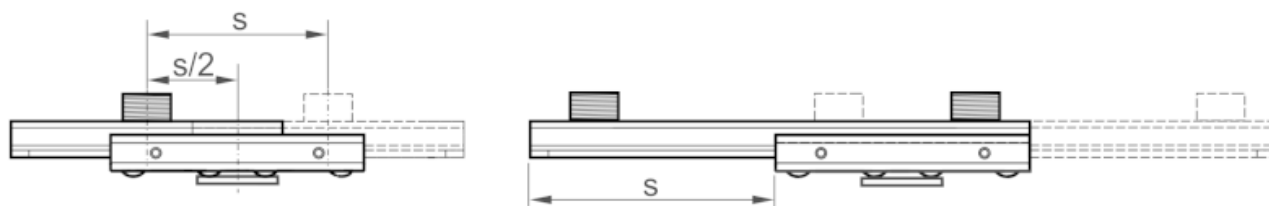

Type	Max. lever arm[mm]	Max. glide path s[mm]
GS F 100 2G2	250	135

Perm. load support: 1,2 kN

Perm. load suspended: 0,6 kN

Permanent temperature range: 130°C

Static friction coefficient μ_0 : 0,20

Sliding friction coefficient μ : 0,15

Material:

- Slide element: Steel, HCP;
- Slide bars: Polyamide (glass-fibre reinforced);
- Retaining plate: Steel, HCP.

Codice	Nome	Peso	Numero di pezzi
113093	GS F 100 2G2	0.79	10

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com