


# CLAMPING END SKL

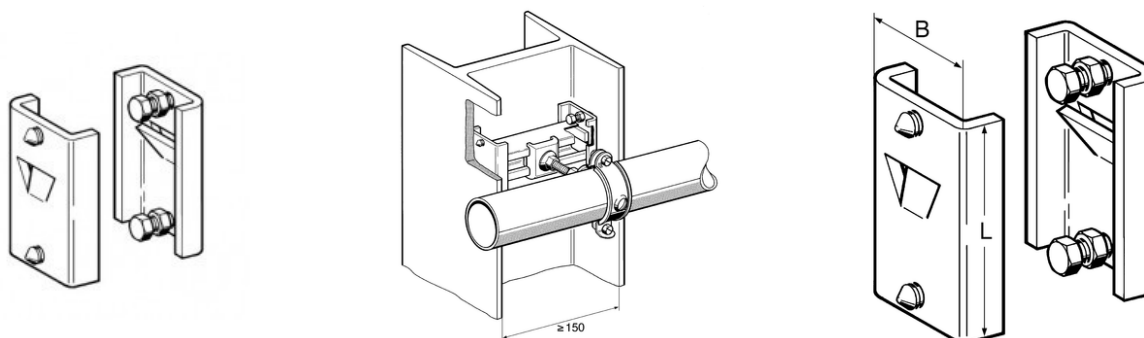

## APPLICATION

Mounting element to be fixed within the flanges of I- and U-shaped beams. The systems (such as pipes, etc.) supported this way may run parallel or at right angles to the direction of the I or U beam.

Also suitable as support for crossbars between two vertically adverse arranged profiles.

## SCOPE OF DELIVERY

Pre-assembled.

## INSTALLATION

The tightening moment of the clamping bolts must be between 1 (minimum) and 1 1/2 (maximum) turns; then tighten locking nuts.

Note: The length of the channel to be cut : inside diameter of beam less 25 mm

### PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15  
30030 Pianiga - Venezia - Italy  
T +39.041.510.1622  
F +39.041.5131351

P.IVA 03470750278  
Reg.Imp. Ve 03470750278  
Cap.soc. € 90.000,00  
REA Padova n° 311219

[info@prosystemitalia.com](mailto:info@prosystemitalia.com)  
[prosystemitalia.com](http://prosystemitalia.com)

## TECHNICAL DATA

Permissible load per set: Crossbar support: (2 sets) 5.0 kN/crossbar

Single attachment: (1 set) 2.5 kN

The maximal torsional moment of the channel is to be taken into consideration.

Material: Cold-worked steel, electro-galvanised.

Dimensions:

- L: 100 mm

- B: 62 mm

Minimum beam type: IP 140. U 200

Codice	Nome	Peso	Numero di pezzi
145671	SKL	0.84	5

### PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15  
30030 Pianiga - Venezia - Italy  
T +39.041.510.1622  
F +39.041.5131351

P.IVA 03470750278  
Reg.Imp. Ve 03470750278  
Cap.soc. € 90.000,00  
REA Padova n° 311219

[info@prosystemitalia.com](mailto:info@prosystemitalia.com)  
[prosystemitalia.com](http://prosystemitalia.com)