


CANTILEVER BRACKET AK F 80/30

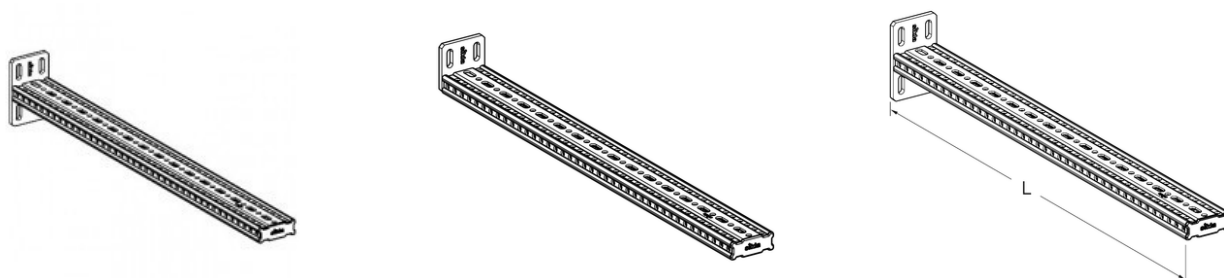

APPLICATION

Galvanised hollow-box-section with welded end-plate to serve as cantilever arm. May be used as a crossbar when combined with End Support STA and 4 x Self Forming Screw FLS.

INSTALLATION

With 4 x Self Forming Screw FLS when fixed to another siFramo hollow-box-section. Alternatively with two suitable wall anchors through holes "A" when fixed directly to building structure.

TECHNICAL DATA

Type	L[mm]	Dimensions of base plate[mm]	Slots in base plate for
AK F 80/30-400	400	130 x 80 x 8	M10
AK F 80/30-800	800	130 x 80 x 8	M10
AK F 80/30-E-400	400	80 x 80 x 8	M10
AK F 80/30-E-800	800	80 x 80 x 8	M10

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com

Configuration: Plate welded with Beam Section F 80/30

Material:

- Plate: Steel, HCP;
- Beam section: Steel, HCP.

APPROVALS

CE mark, according to EN 1090.



Codice	Nome	Peso	Numero di pezzi
113064	AK F 80/30 L=400mm	2.4	1
113065	AK F 80/30 L=800mm	4.18	1
113625	AK F 80/30-E L=400mm	2.2	1
113626	AK F 80/30-E L=800mm	3.98	1

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com