


# SLIDE SET GS H3G

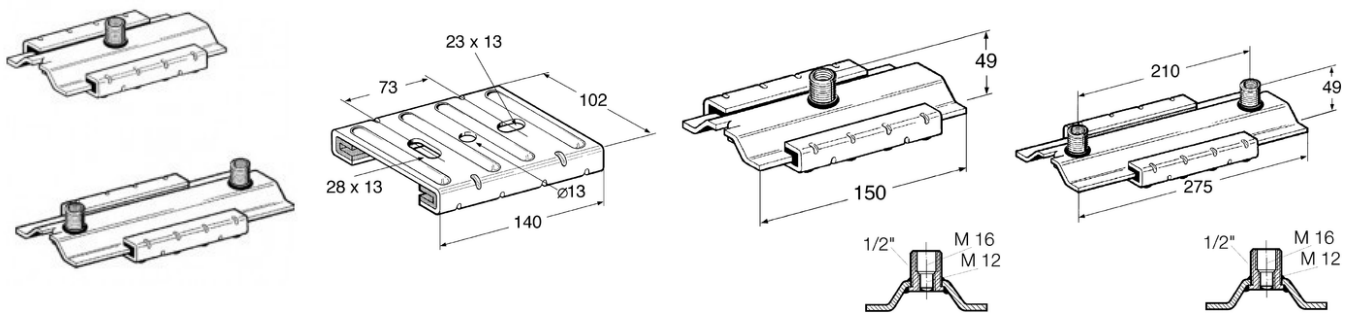

## APPLICATION

Heavy-duty Slide Set for plant construction. To be used preferably in combination with pipe clamp Stabil D-3G and Refrigeration clamp SKS Top-2C.

Various connection options of the pipe clamps depending on the respective load: M12, M16 or with 1/2" adapters using the external thread (see Adapter f/f). Sound absorption by means of glass fibre reinforced polyamide slide rails.

Especially suitable for ceiling and floor mounting solutions and as a guide for rising pipes.

When using the version ULTRAGlide the resultant shear force is halved. By this the realisation of optimized supporting structures is possible.

For wall mounting, we recommend the use of the Slide Set H3G on Support Bracket.

## INSTALLATION

For pipes of NB 100 or larger having to be spaced at a distance from the Slide Set, or under conditions of reversed bending stress, the 3G triple thread nuts are to be secured by screwing on a 1/2" Locking Nut.

### PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15  
30030 Pianiga - Venezia - Italy  
T +39.041.510.1622  
F +39.041.5131351

P.IVA 03470750278  
Reg.Imp. Ve 03470750278  
Cap.soc. € 90.000,00  
REA Padova n° 311219

info@prosystemitalia.com  
prosystemitalia.com

## TECHNICAL DATA

Permissible load for ceiling mounting: 5.0 kN

Permissible load for floor mounting: 9.0 kN

Permissible bending moment for wall mounting\* for H3G2: 350 Nm

Lever arm Lmax: 400 mm

Maximum sliding distance H3G: 100 mm

Maximum sliding distance H3G2: 135 mm

Temperature range (permanent exposure): 130°C

Version GS:

Static friction coefficient  $\mu_0$  : 0.18

Sliding friction coefficient  $\mu$ : 0.14

Version GS ULTRAglide:

Static friction coefficient  $\mu_0$ : 0.07

Sliding friction coefficient  $\mu$ : 0.07

Material:

- Metal components: Steel, electro-galvanised;
- Slide bar: Polyamide, glass fibre reinforced;
- Version ULTRAglide: with additional Nano coating.

\* The permissible bending moment of the connecting element (threaded rod or threaded tube) may restrict the application!

Adm. load FZ \* under stress of fire

### PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15  
30030 Pianiga - Venezia - Italy  
T +39.041.510.1622  
F +39.041.5131351

P.IVA 03470750278  
Reg.Imp. Ve 03470750278  
Cap.soc. € 90.000,00  
REA Padova n° 311219

[info@prosystemitalia.com](mailto:info@prosystemitalia.com)  
[prosystemitalia.com](http://prosystemitalia.com)

FWD 30 [N]	FWD 60 [N]	FWD 90 [N]	FWD 120 [N]
≤ 1.000	≤ 540	≤ 360	≤ 260

FZ = max. adm. tensile load\* The load capacity of the connecting element used is to be respected, this applies in particular under stress of fire.

Codice	Nome	Peso	Numero di pezzi
149295	H3G	1.12	10
110586	H3G Ultra glide	1.12	-
126700	H3G2	1.55	10
110588	H3G2 Ultra glide	1.55	-

**PROSYSTEM ITALIA SRL**

Via Friuli venezia Giulia, 15  
30030 Pianiga - Venezia - Italy  
T +39.041.510.1622  
F +39.041.5131351

P.IVA 03470750278  
Reg.Imp. Ve 03470750278  
Cap.soc. € 90.000,00  
REA Padova n° 311219

[info@prosystemitalia.com](mailto:info@prosystemitalia.com)  
[prosystemitalia.com](http://prosystemitalia.com)