


# SADDLE SY



## APPLICATION

To be used in combination with the rollers PN and PNR. Allows the use of insulated pipes.

## INSTALLATION

V-side, leaning against the pipe, flat side down in the roller support

## TECHNICAL DATA

Materials:

- Saddle: Carbon Steel;
- Treatment: zinc plated (white color).
- Material: steel class 8 electro-galvanized.

Type	Diam. [mm]	Max adm. load [kN]	A [mm]	B [mm]	C [mm]	L lenght [mm]	S insulation [mm]
SY 1	0 - 80	6,0	60	25	80	200	40
SY 2	80 - 180	10,0	60	35	95	300	60


### PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15  
30030 Pianiga - Venezia - Italy  
T +39.041.510.1622  
F +39.041.5131351

P.IVA 03470750278  
Reg.Imp. Ve 03470750278  
Cap.soc. € 90.000,00  
REA Padova n° 311219

[info@prosystemitalia.com](mailto:info@prosystemitalia.com)  
[prosystemitalia.com](http://prosystemitalia.com)

Type	Diam. [mm]	Max adm. load [kN]	A [mm]	B [mm]	C [mm]	L lenght [mm]	S insulation [mm]
SY 3	180 - 300	15,0	92	60	125	300	80
SY 4	300 - 500	25,0	135	90	170	300	110

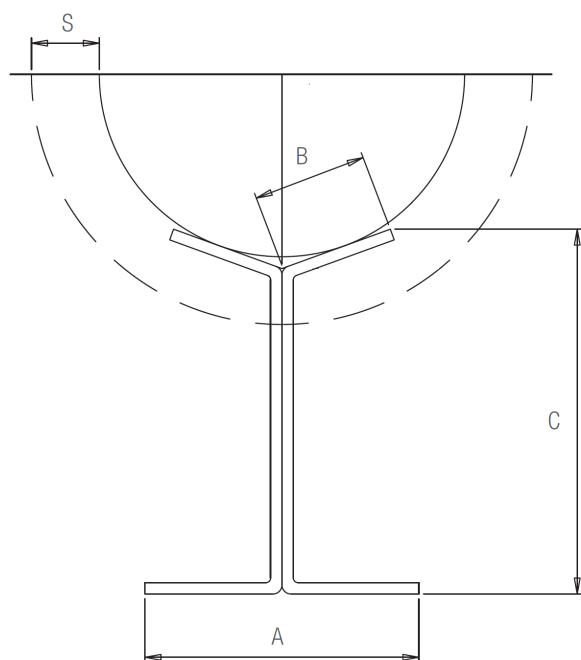

Codice	Nome	Peso	Numero di pezzi
127328	SY1 0 - 80 mm	1	1
127334	SY2 80 - 180 mm	1.85	1

**PROSYSTEM ITALIA SRL**

Via Friuli venezia Giulia, 15  
30030 Pianiga - Venezia - Italy  
T +39.041.510.1622  
F +39.041.5131351

P.IVA 03470750278  
Reg.Imp. Ve 03470750278  
Cap.soc. € 90.000,00  
REA Padova n° 311219

[info@prosystemitalia.com](mailto:info@prosystemitalia.com)  
[prosystemitalia.com](http://prosystemitalia.com)