


SLIDE SET GS 2G-PL SS

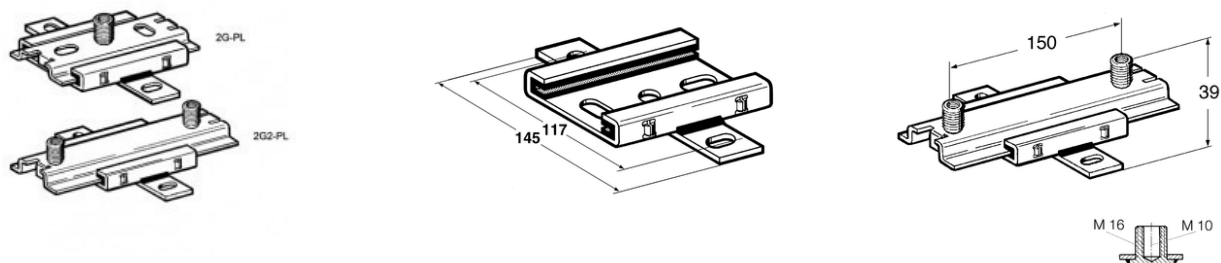

APPLICATION

Slide Set for single and double mounting of mechanical equipment, to be used on Channels, brick or concrete walls and on bearers. To be used preferably in combination with pipe clamps Stabil D-2G ss. Various connection options with these pipe clamps ranging between M10 and R 1" using adapters (see Adapters f/f ss).

Sound absorption by means of glass fibre reinforced PA.

TECHNICAL DATA

Permissible load for ceiling mounting: 0.6 kN

Permissible load for floor mounting: 1.2 kN

Lever arm L_{max} : 300 mm

Max. sliding distance Type 2G-PL: 85 mm

Max. sliding distance Type 2G2-PL: 140 mm

Temperature range: 130°C (permanent exposure)

Static friction coefficient μ_0 : 0.18

Sliding friction coefficient μ : 0.14

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com

Material:

- Metal components and Slide rails: Stainless steel A4.

Codice	Nome	Peso	Numero di pezzi
170170	2G-PL A4	0.52	25
170198	2G2-PL A4	0.63	25

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com