


# SLEIGH 2G2 HCP

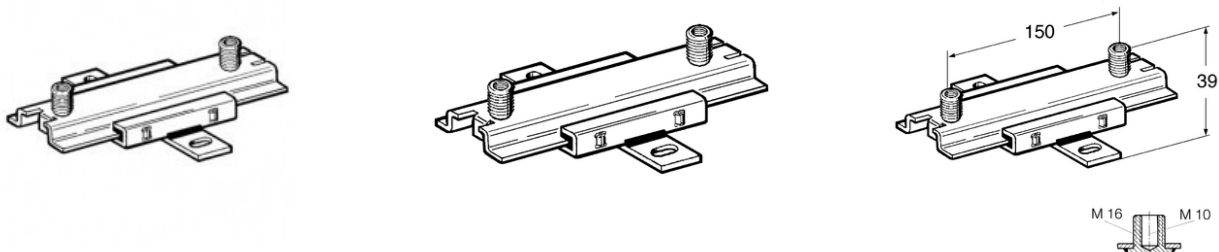

## APPLICATION

Slide Set for single and double mounting of mechanical equipment or concrete walls and on bearers. Various connection options with these pipe clamps ranging between M10 and R1". For adapters for these connection options (see Adapter AD f/f). Sound absorption by means glass fibre reinforced PA slide rails.

## TECHNICAL DATA

Permissible load for ceiling mounting: 0.6 kN  
 Permissible load for floor mounting: 1.2 kN  
 Lever arm Lmax: 150 mm  
 Max. Slide path: 140 mm  
 Temperature range (permanent exposure): 130°C  
 Static friction coefficient  $\mu_0$ : 0.18  
 Sliding friction coefficient  $\mu$ : 0.14  
 Material: Metal components: Steel, HCPSlide bar: Polyamide, glass fibre reinforced  
 Adm. load FZ \* under stress of fire

FWD 30[N]	FWD 60[N]	FWD 90[N]	FWD 120[N]
≤ 600	≤ 430	≤ 280	≤ 200

FZ = max. adm. load

\* The load capacity of the connecting elements used is to be respected, this applies in particular under stress of fire.

### PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15  
 30030 Pianiga - Venezia - Italy  
 T +39.041.510.1622  
 F +39.041.5131351

P.IVA 03470750278  
 Reg.Imp. Ve 03470750278  
 Cap.soc. € 90.000,00  
 REA Padova n° 311219

info@prosystemitalia.com  
 prosystemitalia.com

Codice	Nome	Peso	Numero di pezzi
114594	2G2-PL	0.65	25

---

**PROSYSTEM ITALIA SRL**

Via Friuli venezia Giulia, 15  
30030 Pianiga - Venezia - Italy  
T +39.041.510.1622  
F +39.041.5131351

P.IVA 03470750278  
Reg.Imp. Ve 03470750278  
Cap.soc. € 90.000,00  
REA Padova n° 311219

[info@prosystemitalia.com](mailto:info@prosystemitalia.com)  
[prosystemitalia.com](http://prosystemitalia.com)