


SLIDE SET GS 2G SS

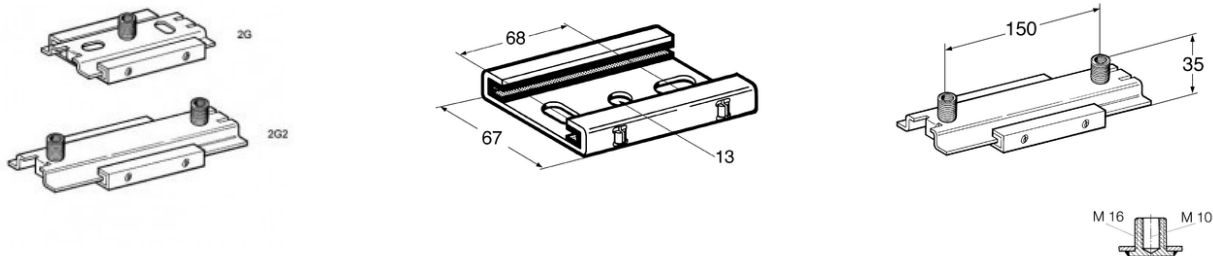

APPLICATION

Slide Set for single and double mounting of mechanical equipment. To be used preferably in combination with Sikla pipe clamps Stabil D-2G ss. Various connection options with these pipe clamps ranging between M10 and R1" using adapters (see Adapters f/f ss)

Sound absorption by means of slide rails of glass fibre reinforced PA.

TECHNICAL DATA

Permissible load for ceiling mounting: 0.6 kN

Permissible load for floor mounting: 1.2 kN

Lever arm L_{max} : 300 mm

Max. sliding distance Type 2G: 85 mm

Max. sliding distance Type 2G2: 140 mm

Temperature range 130°C (permanent exposure)

Static friction coefficient μ_0 : 0.18

Sliding friction coefficient μ : 0.14

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com

Material:

Metal components and Slide rails: Stainless steel A4.

Codice	Nome	Peso	Numero di pezzi
170161	2G A4	0.37	25
170189	2G2 A4	0.49	25

PROSYSTEM ITALIA SRL

Via Friuli venezia Giulia, 15
30030 Pianiga - Venezia - Italy
T +39.041.510.1622
F +39.041.5131351

P.IVA 03470750278
Reg.Imp. Ve 03470750278
Cap.soc. € 90.000,00
REA Padova n° 311219

info@prosystemitalia.com
prosystemitalia.com