


STABIL D-3G WITH SILICONE LINING - prosystemitalia.com

STABIL D-3G WITH SILICONE LINING - Group 1242

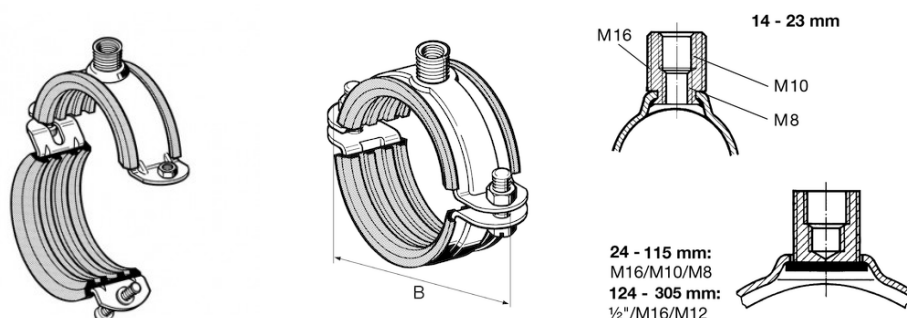

Application

For soundproof installation of pipes in M&E services and plant construction (as per DIN 4109)

Scope of delivery

With silicone sound absorption lining (red); with welded on M16 nut; clamping bolts and nuts included in loose form. Other welded nuts (e.g. M20) or inch sockets available.

Technical Data

The max. admissible load has been determined by using statistical methods resulting from the breaking loads, observing a max. admissible deformation of 1.5 mm resp. 2 % of the max. tensible pipe diameter.

Material:

- Clamp: Steel, electro-galvanised;
- Sound absorption lining: Silicone (see section "[RUBBER PROFILE SAL SILICONE](#)" for technical data).

Size range [mm]	NB	Max working load [kN]	Tightening torque [Nm]	Material W x th [mm]	Thread connection	B [mm]
14 - 18	3/8"	1,8	2	25 x 2.0	M16/M10/M8	63
19 - 23	1/2"	1,8	2	25 x 2.0	M16/M10/M8	69
24 - 28	3/4"	2,0	3	30 x 2.5	M16/M10/M8	74
29 - 33	1 "	2,0	3	30 x 2.5	M16/M10/M8	81
33 - 37		2,0	3	30 x 2.5	M16/M10/M8	85
40 - 45	1 1/4"	2,0	3	30 x 2.5	M16/M10/M8	94
47 - 52	1 1/2"	2,0	3	30 x 2.5	M16/M10/M8	104

53 - 58		2,0	3	30 x 2.5 M16/M10/M8	110
60 - 65	2"	2,0	3	30 x 2.5 M16/M10/M8	117
67 - 72 M		2,0	3	30 x 3.0 M16/M10/M8	137
73 - 78 M	2 1/2"	2,0	3	30 x 3.0 M16/M10/M8	143
79 - 85 M		2,0	3	30 x 3.0 M16/M10/M8	149
88 - 93 M	3"	2,0	3	30 x 3.0 M16/M10/M8	157
100 - 106 M		2,0	3	30 x 3.0 M16/M10/M8	171
108 - 115 M	4"	2,0	3	30 x 3.0 M16/M10/M8	180
124 - 129		2,9	5	40 x 4.0 1/2"/M16/M12	210
131 - 137		2,9	5	40 x 4.0 1/2"/M16/M12	218
138 - 144	5"	2,9	5	40 x 4.0 1/2"/M16/M12	225
148 - 154		2,9	5	40 x 4.0 1/2"/M16/M12	235
156 - 162		2,9	5	40 x 4.0 1/2"/M16/M12	243
165 - 171	6"	8,0	10	40 x 4.0 1/2"/M16/M12	255
177 - 183		8,0	10	40 x 4.0 1/2"/M16/M12	265
188 - 194		8,0	10	40 x 4.0 1/2"/M16/M12	276
196 - 203		8,0	10	40 x 4.0 1/2"/M16/M12	287
205 - 214		8,0	10	40 x 4.0 1/2"/M16/M12	296
219 - 225	8"	8,0	10	40 x 4.0 1/2"/M16/M12	307
244 - 250		8,0	10	40 x 4.0 1/2"/M16/M12	332
267 - 273	10"	8,0	10	40 x 4.0 1/2"/M16/M12	355
299 - 305		8,0	10	40 x 4.0 1/2"/M16/M12	387

Approvals

VdS Approval No. G4920027.

This product has been awarded the RAL quality marks "pipe supports" and is subject to continuous external monitoring according to RAL GZ-655.



Tipo	Kg	Pezzi per confezione	Codice Articolo
14 - 18 mm 3/8"	0.08	50	108070
19 - 23 mm 1/2"	0.09	50	108089
24 - 28 mm 3/4"	0.13	50	108098
29 - 33 mm 1 "	0.14	50	108104
33 - 37 mm	0.15	50	108113
40 - 45 mm 1 1/4"	0.16	50	108122

Tipo	Kg	Pezzi per confezione	Codice Articolo
47 - 52 mm 1 ½"	0.19	50	108131
53 - 58 mm	0.2	50	108140
60 - 65 mm 2"	0.21	50	108159
73 - 78 mm M 2 ½"	0.31	25	115801
	0.33	25	115802
88 - 93 mm M 3"	0.32	25	115804
	0.37	25	115805
108 - 115 mm M 4	0.4	25	115806
	0.43	25	115807
100 - 106 mm	0.4	25	108201
124 - 129 mm	0.87	10	108229
131 - 137 mm	0.91	10	108238
138 - 144 mm 5"	0.94	10	108274
148 - 154 mm	1	10	108283
156 - 162 mm	1.05	10	108292
165 - 171 mm 6"	1.14	10	108308
177 - 183 mm	1.18	10	108317
188 - 194 mm	1.23	10	108326
196 - 203 mm	1.3	10	154947
205 - 214 mm	1.4	10	149879
219 - 225 mm 8"	1.4	10	108335
244 - 250 mm	1.51	10	108344
267 - 273 mm 10"	1.71	10	108353
299 - 305 mm	1.79	10	108362