


DUO CLAMP SRS - prosystemitalia.com

DUO CLAMP SRS - Group 1223

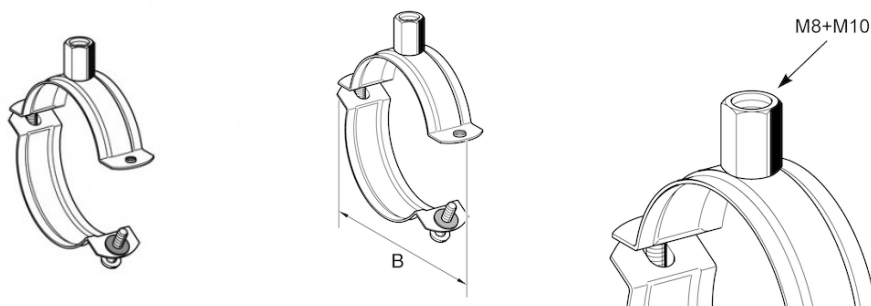

Application

Two-piece pipe clamp with double thread connection (M8/M10) for the installation of pipelines.

Scope of delivery

Supplied with two bolts partially mounted on one side and therefore ready for immediate installation. The clamping bolt on the open side is retained by a plastic washer, thus preventing any accidental unscrewing.

Technical Data

Material: Steel, electro-galvanised.

Size range [mm]	Max. adm. load [kN]	Tightening torque [Nm]	Material W x th B [mm] [mm]
13 - 18	0,6	2	20 x 1.5 53
19 - 22	0,6	2	20 x 1.5 55
23 - 26	0,6	2	20 x 1.5 59
27 - 30	0,6	2	20 x 1.5 63
32 - 36	0,6	2	20 x 1.5 69
40 - 44	0,6	2	20 x 1.5 76
48 - 54	0,6	2	20 x 1.5 92
55 - 59	0,6	2	20 x 1.5 99
60 - 66	0,6	2	20 x 1.5 105
68 - 73	0,6	2	20 x 1.5 112
75 - 80	2,5	2	25 x 2.0 125
84 - 89	2,5	2	25 x 2.0 134
90 - 98	2,5	2	25 x 2.0 141

94 - 101	2,5	2	25 x 2.0	147
102 - 108	2,5	2	25 x 2.0	151
110 - 115	2,5	2	25 x 2.0	160
118 - 125	2,5	2	25 x 2.5	173
129 - 136	2,5	2	25 x 2.5	186
138 - 144	2,5	2	25 x 2.5	193
144 - 153	2,5	2	25 x 2.5	203
159 - 167	2,5	2	25 x 2.5	215

Tipo	Kg	Pezzi per confezione	Codice Articolo
13 - 18 mm 3/8"	0.04	100	173216
19 - 22 mm 1/2"	0.05	100	173225
27 - 30 mm 3/4"	0.05	100	173234
32 - 36 mm 1"	0.05	100	173243
40 - 44 mm 1 1/4"	0.06	50	173252
48 - 54 mm 1 1/2"	0.07	50	173261
55 - 59 mm	0.08	50	182990
60 - 66 mm 2"	0.08	50	173279
68 - 73 mm	0.09	25	173288
75 - 80 mm 2 1/2"	0.15	25	173297
84 - 89 mm 3"	0.16	25	173306
90 - 98 mm	0.16	25	186023
94 - 101 mm	0.17	25	186032
102 - 108 mm	0.18	25	173315
110 - 115 mm 4"	0.18	25	173324
118 - 125 mm	0.24	25	186041
129 - 136 mm	0.26	25	191387
138 - 144 mm 5"	0.27	25	191396
144 - 153 mm	0.29	25	191405
159 - 167 mm	0.3	25	191414