


U CLAMP RUC - prosystemitalia.com

U CLAMP RUC - Group 1203

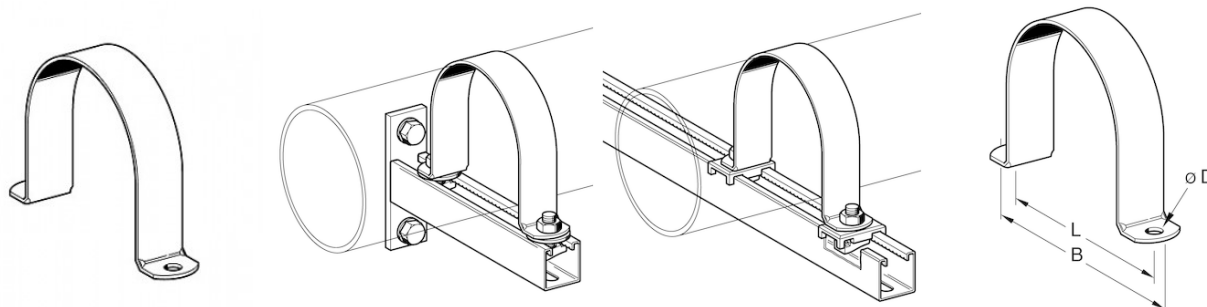

Application

For mounting pipes directly on a support, especially suitable as a replacement for U Bolts in connection with channels or cantilever brackets. When using T Bolts, their washer can be used in between the channel and the U Clamp. Dimensions and cross-sections are in keeping with the VdS standard.

Technical Data

Material: Steel, pre-galvanised as per DIN EN 10346.

Type	For pipe	Material [mm]	B [mm]	L [mm]	ø D [mm]
18	3/8"	30 x 2.5	69	49	9
22	1/2"	30 x 2.5	73	53	9
28	3/4"	30 x 2.5	79	59	9
34	1"	30 x 2.5	85	65	9
43	1 1/4"	30 x 2.5	94	74	9
49	1 1/2"	30 x 2.5	100	80	9
61	2"	30 x 2.5	112	92	9
77	2 1/2"	30 x 2.5	128	108	9
90	3"	30 x 2.5	141	121	9
115	4"	40 x 3.0	183	155	13
141	5"	40 x 3.0	209	181	13
169	6"	40 x 3.0	236	207	13
221	8"	40 x 3.0	289	261	13
275	10"	50 x 5.0	375	325	17
326	12"	50 x 5.0	426	373	17

Tipo	Kg	Pezzi per confezione	Codice Articolo
18 mm 3/8"	0.09	50	159012

Tipo	Kg	Pezzi per confezione	Codice Articolo
22 mm ½"	0.05	50	159021
28 mm ¾"	0.06	50	159030
28 mm ¾"	0.06	50	159030Z
34 mm 1"	0.07	25	159049
34 mm 1"	0.07	25	159049Z
43 mm 1 ¼"	0.08	25	159058
43 mm 1 ¼"	0.08	25	159058Z
49 mm 1 ½"	0.11	25	159067
49 mm 1 ½"	0.11	25	159067Z
61 mm 2"	0.11	25	159076
61 mm 2"	0.11	25	159076Z
77 mm 2 ½"	0.16	25	159085
77 mm 2 ½"	0.16	25	159085Z
90 mm 3"	0.16	25	159094
90 mm 3"	0.16	25	159098Z
90 mm 3"	0.16	25	159094Z
115 mm 4"	0.31	25	159100
141 mm 5"	0.37	10	159119
141 mm 5"	0.37	10	159119Z
169 mm 6"	0.44	1	159128
221 mm 8"	0.55	1	159137
275 mm 10"	1.43	1	159146
326 mm 12"	1.69	1	159155