


DUCTING CLAMP PLU 2G-N WITH LINING - [prosystemitalia.com](http://prosystemitalia.com)

## DUCTING CLAMP PLU 2G-N WITH LINING - Group 1623

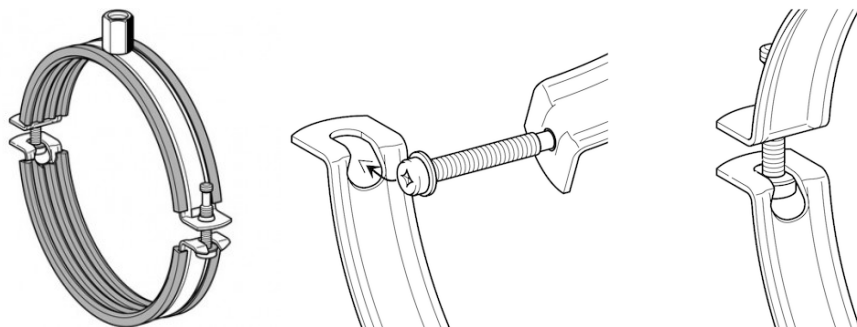

### Application

Two-piece pipe clamp for simple installation of spiral-seam ducts.

Suitable for soundproof installation according to DIN 4109.

### Scope of delivery

Clamping bolts are pre-mounted and retained. Pivot screw for safe and simple assembly with quick-set clip, suitable for "single-hand" mounting. Easier handling and better storage possibilities due to optimized packaging.

### Installation

Tighten upper part of the pipe clamp without the interfering lower part.

Hook lower part, provided with a keyhole, into the fixed clamping bolt (see picture).

After inserting the pipe and locating into the pivot screw, the clamping bolt head is located behind the angled profiles; then tighten clamping bolt with max. 2 Nm.

### Technical Data

Material: Steel, galvanised;

Insulation insert: SBR/EPDM black (see section "[RUBBER PROFILE SAL SBR/EPDM](#)" for technical data).

Type	Material [mm]	Perm. load capacity [kN]	Thread connection
71 - 200	20 x 1.5	0.8	M8/M10
224 - 500	25 x 1.5	1.0	M8/M10

Tipo	Kg	Pezzi per confezione	Codice Articolo
DN 71	0.1	1	199824
DN 80	0.12	1	199831
DN 90	0.12	1	199848
DN 100	0.14	1	199855
DN 100	0.14	1	111787
DN 112	0.15	1	199862
DN 125	0.16	1	199879
DN 140	0.17	1	199886
DN 150	0.19	1	199893
DN 160	0.19	1	199909
DN 180	0.21	1	199916
DN 200	0.23	1	199923
DN 224	0.31	1	199930
DN 250	0.37	1	199947
DN 280	0.36	1	199954
DN 300	0.38	1	199961
DN 315	0.42	1	199978
DN 355	0.46	1	199985
DN 400	0.52	1	199992
DN 450	0.58	1	199993
DN 500	0.64	1	199994