


CHANNEL HOLDER MOF 27 - prosystemitalia.com

CHANNEL HOLDER MOF 27 - Group 2753

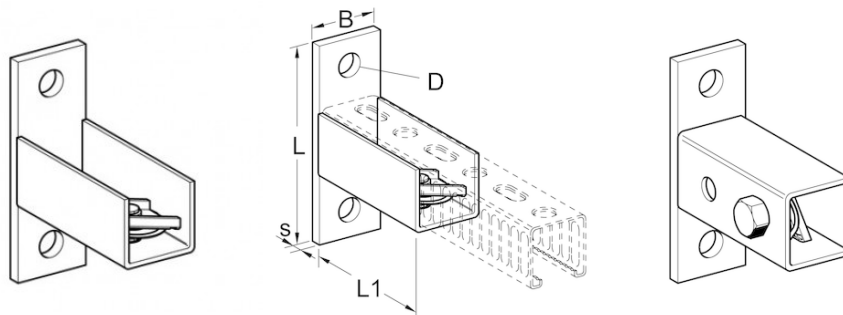

Application


To be used for installing crossbars between two channels 27 or as base unit for projecting channels.

Note: When assembling version MH as cantilever, consider sufficient bracing of the channel. In case of tension load F_z at channel slot, screws must be displaced.

Scope of delivery


Completely assembled. Installation Position the channel into the U-profile. Click in the speed nut by pushing on the bolt head and tighten with 10 Nm.

Technical Data

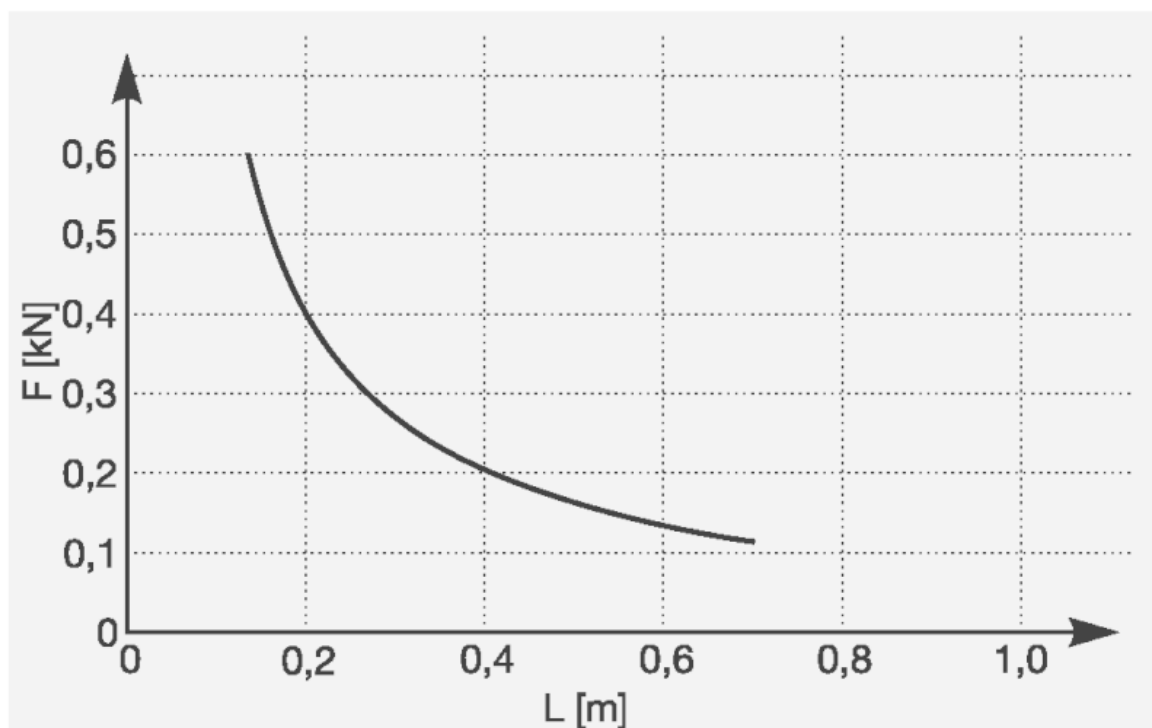

Adm. anchor loads to be respected.

Max. adm. load for assembly on ceilings in vertical direction: 0,8 kN.



Material: Steel, electro-galvanised.

Tipo	Kg	Pezzi per confezione	Codice Articolo
MH 27	0.2	25	198858
MV 27	0.2	25	198865