


CHANNEL HOLDER MOF 27 - [prosystemitalia.com](http://prosystemitalia.com)

## CHANNEL HOLDER MOF 27 - Group 2753

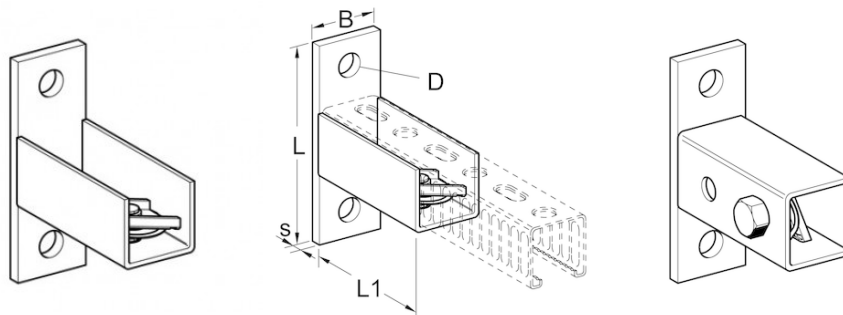

### Application


To be used for installing crossbars between two channels 27 or as base unit for projecting channels.

Note: When assembling version MH as cantilever, consider sufficient bracing of the channel. In case of tension load  $F_z$  at channel slot, screws must be displaced.

### Scope of delivery


Completely assembled. Installation Position the channel into the U-profile. Click in the speed nut by pushing on the bolt head and tighten with 10 Nm.

### Technical Data

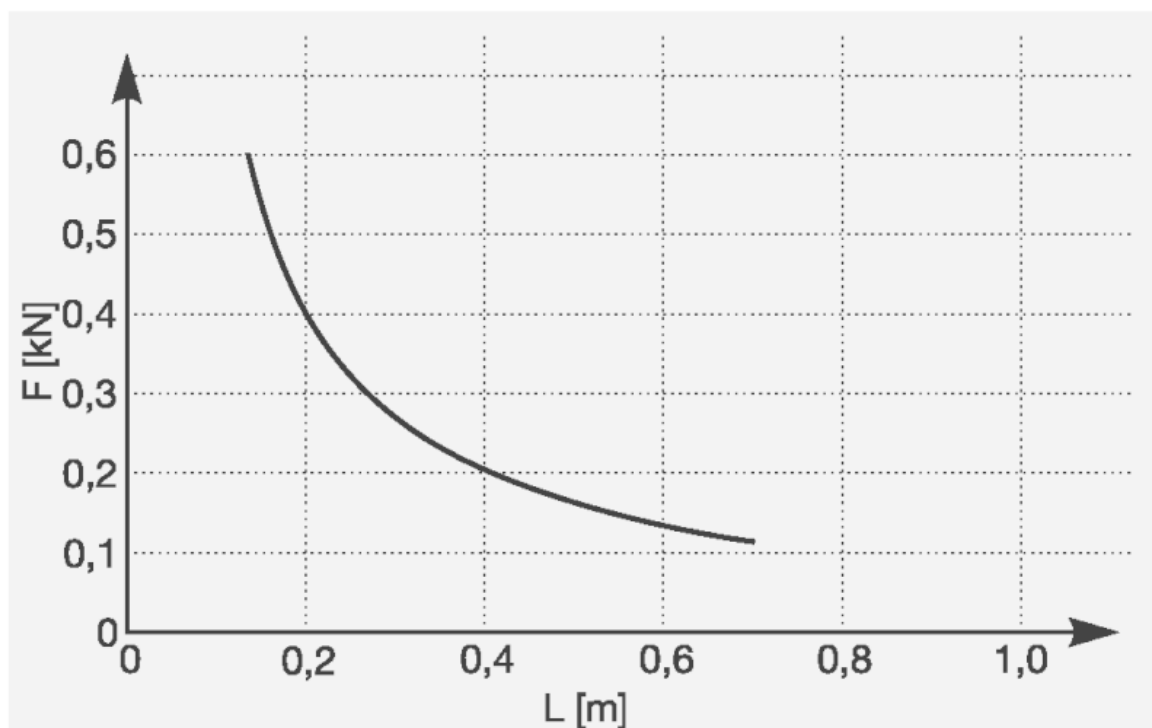

Adm. anchor loads to be respected.

Max. adm. load for assembly on ceilings in vertical direction: 0,8 kN.



Material: Steel, electro-galvanised.

Tipo	Kg	Pezzi per confezione	Codice Articolo
MH 27	0.2	25	198858
MV 27	0.2	25	198865