


CANTILEVER BRACKET AK 27 - 1,25 - prosystemitalia.com

CANTILEVER BRACKET AK 27 - 1,25 - Group 2754

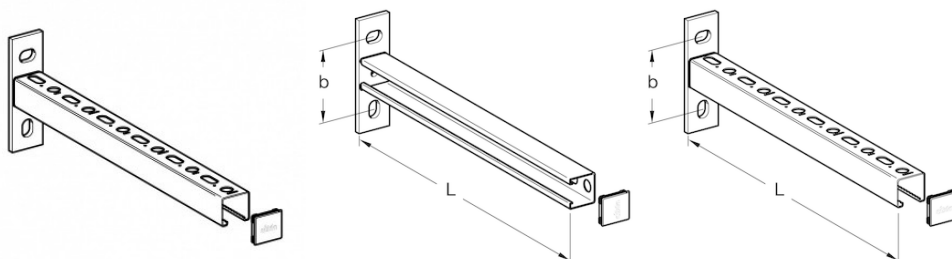

Application

Recommended for wall suspension or Fixing to other building structures.

Installation

For cantilever projections in excess of 500mm we recommend a vertical brace and for lateral forces on the cantilever, use a lateral brace connected via Fixing Bracket MW S 45/30/90.


Technical Data


Material: Steel, electro-galvanised.

Elongated hole 10*25mm, $b = 64$ mm

1 = Type 27/25

2 = Type 27/37

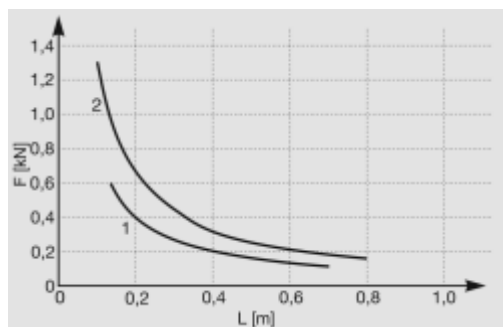



Perm. anchor loads to be considered

$$\sigma_{act.} \leq \sigma_{adm.}$$

$$f_{adm.} \leq L/150$$

Max. torsional moment Mt_{max} without considering the torsional angle

$$Mt_{max} = 20 \text{ Nm}$$

Tipo	Kg	Pezzi per confezione	Codice Articolo
27/25 L= 200 mm	0.25	25	112326
27/25 L= 250 mm	0.29	25	112327
27/25 L= 300 mm	0.34	25	112328
27/25 L= 500 mm	0.49	25	112329
27/25 L= 700 mm	0.65	1	112330
27/37 L= 300 mm	0.4	25	111458
27/37 L= 500 mm	0.6	25	111459
27/37 L= 700 mm	0.8	1	111460
27/37 L= 800 mm	0.9	1	111461
27/25 Q L= 300 mm	0.34	25	112366