


BEAM CLAMP SB 27 - prosystemitalia.com

BEAM CLAMP SB 27 - Group 2731

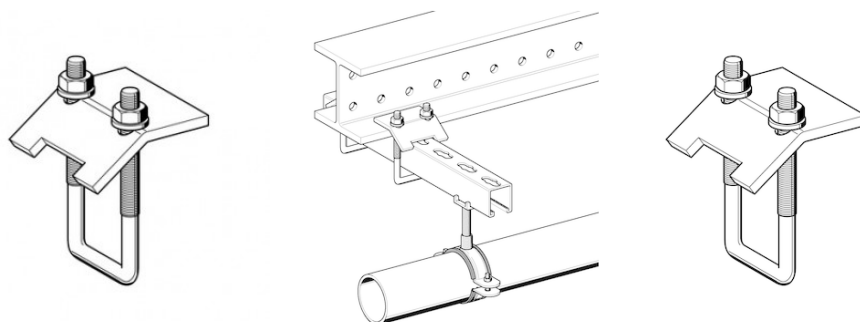

Application

Connecting element to fix Channel MS 27 to beam- and girder structures. Fixing to the channel regardless the orientation of channel opening or slotted side .

Scope of delivery

Completely pre-assembled with U-Bolt, Bracket and Flange Nut.

Installation

To be used in pairs only.

Tightening torque: 20 Nm

Length calculation = Beam/Girder flange thickness + min. 2 x 50 mm overhang.

Technical Data

Max. perm. load tension: 2.0 kN per Beam Clamp

Material: Steel, electro-galvanised

Type	max. flange thickness [mm]	Thread
27 - M8	25	M8

Tipo	Kg	Pezzi per confezione	Codice Articolo
SB 27 M 8	0.28	20	195864