


CLAMPING UNIT KL - prosystemitalia.com

CLAMPING UNIT KL - Group 1357

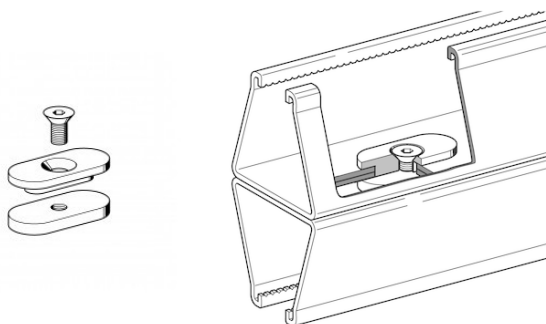

Application

Used for assembling double channels made from Channels with slot pattern III or IV, i.e. with a minimum material thickness of 2.5 mm.

This system could be used for pre-assembly in a workshop also.

When a torque wrench is required in order to ensure that the static values indicated on page 3-7 are achieved.

Attention: These values are only guaranteed when using our Channels.

Scope of delivery

Consists of forming plate, pressure plate and a hexagon socket bolt M8 (DIN 7991)

Installation

Max. spacing between connecting points is 500 mm, with one point at each end of the channel section. Required number of Clamping Units: channel 2m = 5 pcs., channel 6m = 13 pcs.

For channel 41/21/2,0 no connecting elements, like channels nuts, etc. could be placed directly above the connectors.

Torque: $M = 25 \text{ Nm}$

Technical Data

Material: Malleable cast iron, electro-galvanised.

Tipo	Kg	Pezzi per confezione	Codice Articolo
KL 1	0.11	50	118055