


CHANNEL LINING SAL 41 - prosystemitalia.com

## CHANNEL LINING SAL 41 - Group 1611

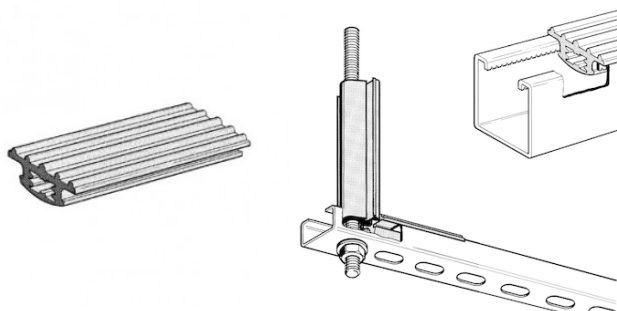

### Application

Sound Absorption Lining for inserting into Sikla Channels or fitting around threaded rods; mainly for use in ducting systems, also for sound proof installations as per DIN 4109.

### Scope of delivery

Rolls of 30 m or pieces of 50 mm each.

### Technical Data

Material: SBR/EPDM, black.

Temperature range: -50°C up to +110°C

Fire resistance: B2 according to DIN 4102, non-dripping

Hardness: 50° +/- 5° Shore

Tipo	Kg	Pezzi per confezione	Codice Articolo
Tipo 41 L=30 m	0.43	30	101189
Tipo 41 L=50 mm	0.02	100	101204