


FIXING BRACKET MW S - prosystemitalia.com

FIXING BRACKET MW S - Group 1326S

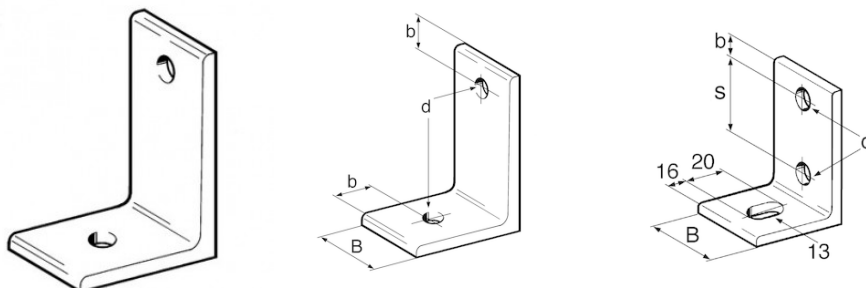

Application

Designed for general mounting purposes as a direct lateral attachment link integrated in binding and bridging beams of concrete or wood, and for similar applications. It may serve as a connecting bracket for framework structures consisting of channels.

Types 60/30/90° and 90/60/90° are designed for attachment of pipes to wooden truss according to VdS CEA-standard 15.2.2.

Technical Data



Material: Angle steel profile, electro-galvanised.

Type	Working load [kN]	B [mm]	b [mm]	d [mm]	s [mm]
45/30/90°	3.5	30	13	11	-
70/40/90°	2.0	40	17/35	10,5	-
60/40/90°	7.5	40	20	13	-
90/60/90°	7.5	40	15	13	50

Note: for Sprinkler systems, application of 60/30/90 and 90/60/90 to wooden truss.

Single Bracket with wooden screw

Double Bracket with threaded bolt



"d" depending on NB:

≤ NB 50: 2 x 6 mm

> NB 50 ≤ DN 100: 2 x 8 mm

> NB 100 ≤ DN 150: 2 x 10 mm

Tipo	Kg	Pezzi per confezione	Codice Articolo
S 45/30	0.07	50	115380
S 60/40	0.17	25	115399
S 90/60	0.26	25	114820
S 70/40	0.06	50	191963