


SAFETY STRAP SL VDS - prosystemitalia.com

SAFETY STRAP SL VDS - Group 1338

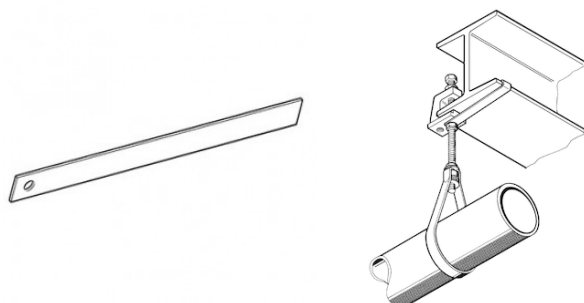

Application

Additional safety feature for Beam Clamps supporting tubes of nominal diameter NB 80 and larger, required for installations meeting the Vds standard.

Dimensions and material meet the VdS CEA-guideline for Sprinkler systems.

Installation

The safety strap is bent on the construction site to the form of the beam, so that it securely encompasses the edge of the beam flange.

Technical Data

Material: Steelstrip, pre-galvanised.

Application:

Type I: NB 80 - NB 100

Type II: NB 125 - NB 150

Type III: NB 200

Type	Length [mm]	Bore [mm]	Dimensions b x s [mm]
I M10	400	11	20 x 2,5
II M12	400	13	30 x 2,5
III M16	400	17	40 x 3,0

Tipo	Kg	Pezzi per confezione	Codice Articolo
Tipo I M10	0.16	50	116798
Tipo II M12	0.23	50	116804
Tipo III M16	0.36	50	116813