


U-HOLDER 41 - prosystemitalia.com

U-HOLDER 41 - Group 1331

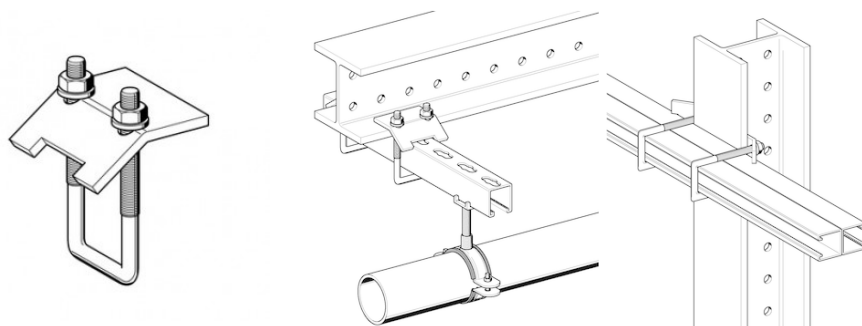

Application

Clamping element for bi-lateral attachment of crossbars to steel beams, independent from the channel's opening.

Installation

To be used in pairs.

Length calculation = Beam/Girder flange thickness + min. 2 x 50 mm overhang

Technical Data

Type	Max. perm. load tension	Tightening torque
M8	3.5 kN per Beam Clamp	20 Nm
M10	5.0 kN per Beam Clamp	30 Nm

Material: Steel, electro-galvanised.

Type	For channel height [mm]	Max. flange thickness [mm]	Ø thread [mm]
41 - M 8	20 - 62	16	M 8
41 - M 10	20 - 62	16	M 10
41 D - M 10	80 - 124	16	M 10

Tipo	Kg	Pezzi per confezione	Codice Articolo
41 - M10 h= 20-62 mm	0.41	50	183620A2
41 - M 8 h= 20-62 mm	0.31	20	192566

Tipo	Kg	Pezzi per confezione	Codice Articolo
41 - M10 h= 20-62 mm	0.41	20	183620
41D - M10 h= 80-124 mm	0.48	20	191657
41D - M10 h= 80-124 mm	0.48	20	191656