


BOLT STEEL ANCHOR AA - prosystemitalia.com

BOLT STEEL ANCHOR AA - Group 1408A

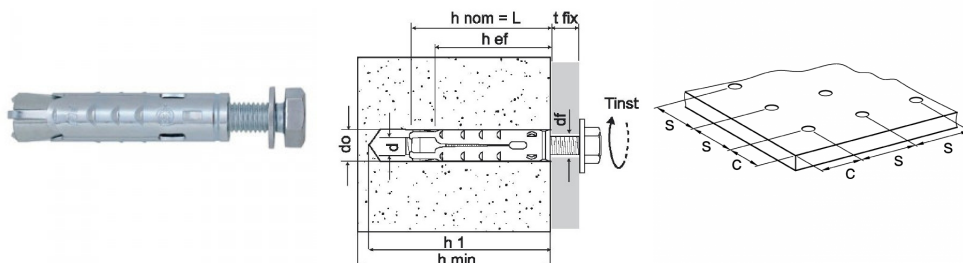

Application

Universal use for anchoring medium-heavy loads. The anchor is also available with hex head screw and screw hook. Features:

- for medium-heavy anchors;
- application of compact materials such as concrete, solid brick and stone;
- provided with lateral fins antirotation;
- antidust cap to protect the thread of the cone in the phase of insertion into the hole;

Technical Data

Material:

- Anchor: zinc-plated steel;
- Screw: stainless steel 8.8.

Type	M6	M8	M10	M12
tfix [mm]	5	10	20	20
d0 [mm]	10	12	15	18
h1 ≥ [mm]	60	70	80	100
hef [mm]	36	43	50	69
hmin [mm]	100	100	100	140
Screw lenght [mm]	50	60	80	100
Nominal tightening torque [Nm]	8	15	30	50
Working load with CLS C20/25				
S _{cr} [mm]	105	130	150	280
C _{cr} [mm]	54	65	75	104

Type	M6	M8	M10	M12
Traction[kN]	3,6	5,7	8,5	11,9
Shear with screw cl 8.8 [kN]	3,7	8,2	13,3	19,3
S _{min} [mm]	35	45	50	75
C _{min} [mm]	35	45	50	75
Carichi ammissibili bimattone doppio UNI				
Traction/shear [kN]	0,9	1,1	1,3	1,6
S [mm]	200	200	200	200
C [mm]	100	100	100	100

Approvals

Declared CE ETA-09/0067.



Tipo	Kg	Pezzi per confezione	Codice Articolo
AA-TE M 8	0.05	50	112866
	0	50	F501469
	0	1	F90257
AA-TE M 6	0.05	50	112853
AA-TE M 8	0.05	50	112856
AA-TE M10	0.05	25	112860
AA-TE M12	0.05	20	112864