


SCREWBOLT TSM - LP - prosystemitalia.com

SCREWBOLT TSM - LP - Group 1405

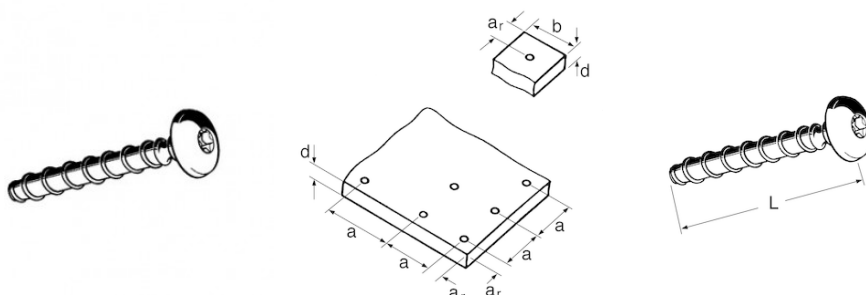

Application

Suitable for quick and safe fixation of Channels to concrete ceilings or walls. For the installation of Channel 27 the Screwbolt TSM LPS must be fixed through the round hole in the perforation of the Channel.

To be applied in closed rooms - except for humidors.

- Easy installation via self-cutting action of screwbolt threads into concrete
- Small edge and axial distances to adjacent fixings, due to low expansion pressure when installed
- Excellent transmission of the torque due to Torx connection.
- Also fixes into pressure-resistant natural stones and different solid bricks (not part of ETA approval / guideline)
- Flexible use for high or standard load performances due to 2 anchoring depths
- For single fixings it is possible to additionally seal the drill hole with a special injecton resin against water ingress, prior to the fixing being installed and before the injection resin sets

Installation

For installation an impact wrench or rotary screwgun with a Torx bit T30 is to be used. The screwgun or impact wrench should not be used with any hammer-action setting engaged on the tool.

Technical Data

Single fixing:

Extract from application conditions of ETA-16/0655

Admissible loads not affected by centre and edge distances.

Total safety factor respected according ETAG 001 (YM YF).

Tipo	Kg	Pezzi per confezione	Codice Articolo
	0.02	100	115026

Tipo	Kg	Pezzi per confezione	Codice Articolo
	0.02	100	115722