


SLIDE SET GS 2G SS - [prosystemitalia.com](http://prosystemitalia.com)

## SLIDE SET GS 2G SS - Group 1736B

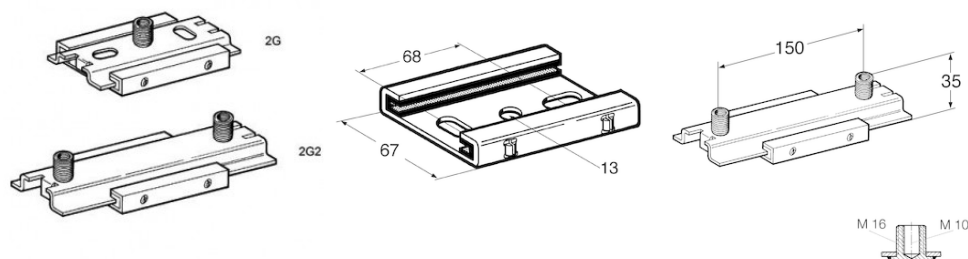

### Application

Slide Set for single and double mounting of mechanical equipment. To be used preferably in combination with Sikla pipe clamps Stabil D-2G ss. Various connection options with these pipe clamps ranging between M10 and R1" using adapters (see Adapters f/f ss)

Sound absorption by means of slide rails of glass fibre reinforced PA.

### Technical Data

Permissible load for ceiling mounting: 0.6 kN

Permissible load for floor mounting: 1.2 kN

Lever arm Lmax: 300 mm

Max. sliding distance Type 2G: 85 mm

Max. sliding distance Type 2G2: 140 mm

Temperature range 130°C (permanent exposure)

Static friction coefficient  $\mu_0$ : 0.18

Sliding friction coefficient  $\mu$ : 0.14

Material:

Metal components and Slide rails: Stainless steel A4.

Tipo	Kg	Pezzi per confezione	Codice Articolo
2G A4	0.37	25	170161
2G2 A4	0.49	25	170189