


BEAM CLIP P SS - [prosystemitalia.com](http://prosystemitalia.com)

## BEAM CLIP P SS - Group 1731

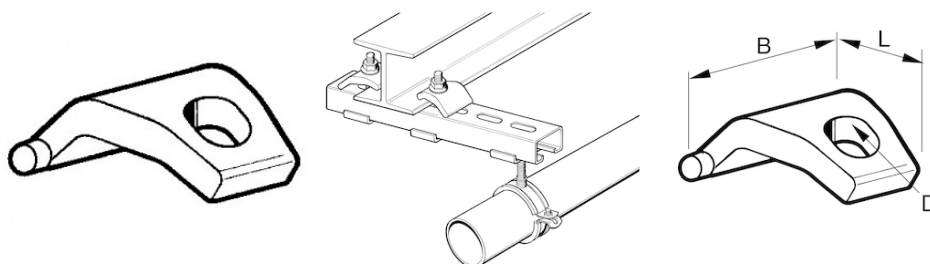

### Application


Universal clamping element for bi-lateral attachment of crossbars for pipe runs, ducts, cable lines and equipment to steel beams.

The maximum clamping range may be extended by up to 10 mm by using spacers. Any thicker spacers should be welded to the crossbar.

### Installation


Determination of the required length  $L_{min}$  of the pass-through bolt:

Hexagon Bolt M12 ss



Pass-through Hexagon bolt ss and Holding Bracket ss:  
 $L_{min} = a + b + 43 \text{ mm}$

Tightening torque  $\pm 10\%$   
P2: 85 Nm

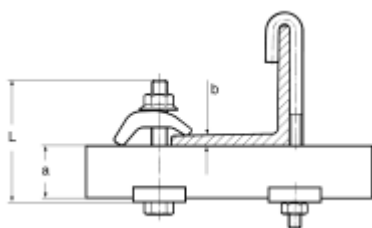

## Technical Data

Working load: 5 kN

Material: Stainless steel A4.

Type	Size range b [mm]	ø D [mm]	L [mm]	B [mm]
P2	1 - 33	13	62	50

Tipo	Kg	Pezzi per confezione	Codice Articolo
P2 Ø 13 mm A4	0.23	25	163435