


STABIL D-3G HCP - prosystemitalia.com

STABIL D-3G HCP - Group 1844

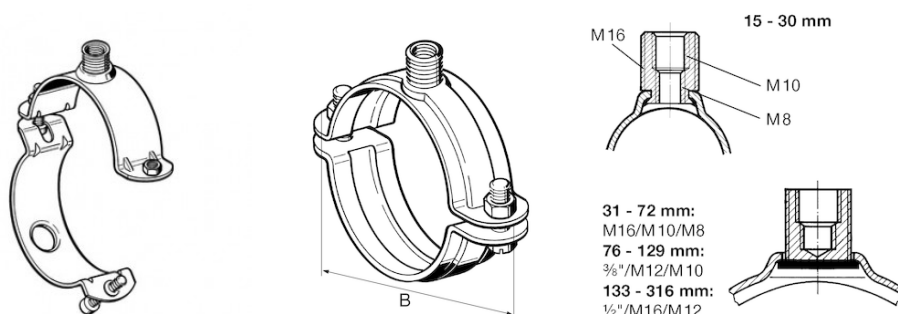

Application

For the installation of pipes required for all M&E services in industrial, residential and public buildings.

Scope of delivery

Sizes 15 to 129 mm are equipped with welded nuts for the clamping bolts. On the joint side, the clamping bolt is pre-assembled; the clamping bolt on the opposite side is mounted into the bore hole and retained by a plastic washer, thus preventing any accidental unscrewing.

For sizes 133 and larger the clamping bolts and the required nuts are supplied in loose form.

With welded in 3G triple thread nut; without sound absorption lining.

Technical Data

Material: Steel, electro-galvanised.

Ø [mm]	DN	Material b x s [mm]	Thread	B [mm]
15 - 19	3/8"	25 x 2,0	M16/M10/M8	57
20 - 24	1/2"	25 x 2,0	M16/M10/M8	62
25 - 30	3/4"	25 x 2,0	M16/M10/M8	68
31 - 35	1"	30 x 2,5	M16/M10/M8	75
40 - 45	1" 1/4	30 x 2,5	M16/M10/M8	85
48 - 53	1" 1/2	30 x 2,5	M16/M10/M8	93
54 - 59		30 x 2,5	M16/M10/M8	104

Ø [mm]	DN	Material b x s [mm]	Thread	B [mm]
60 - 65	2"	30 x 2,5	M16/M10/M8	110
67 - 72		30 x 2,5	M16/M10/M8	117
76 - 81	2" 1/2	30 x 3,0	M16/M10/M8	142
82 - 87		30 x 3,0	M16/M10/M8	148
88 - 93	3"	30 x 3,0	M16/M10/M8	154
102 - 108		30 x 3,0	M16/M10/M8	169
110 - 116	4"	30 x 3,0	M16/M10/M8	177
124 - 129		30 x 3,0	M16/M10/M8	190
133 - 140		40 x 4,0	1/2"/M16/M12	207
140 - 148	5"	40 x 4,0	1/2"/M16/M12	215
149 - 155		40 x 4,0	1/2"/M16/M12	222
159 - 165		40 x 4,0	1/2"/M16/M12	232
167 - 173	6"	40 x 4,0	1/2"/M16/M12	240
176 - 184		40 x 4,0	1/2"/M16/M12	263
188 - 194		40 x 4,0	1/2"/M16/M12	273
199 - 205		40 x 4,0	1/2"/M16/M12	284
207 - 216		40 x 4,0	1/2"/M16/M12	295
219 - 225	8"	40 x 4,0	1/2"/M16/M12	304
244 - 250		40 x 4,0	1/2"/M16/M12	329
267 - 273	10"	40 x 4,0	1/2"/M16/M12	352
278 - 284		40 x 4,0	1/2"/M16/M12	363
297 - 303		40 x 4,0	1/2"/M16/M12	382
310 - 316		40 x 4,0	1/2"/M16/M12	395

Approval

VdS-Approval No. G4920027,

* = FM Approval



Tipo	Kg	Pezzi per confezione	Codice Articolo
15 - 19 mm 3/8"	0.07	50	112216
20 - 24 mm 1/2"	0.08	50	112217
25 - 30 mm 3/4"	0.1	50	112218
31 - 35 mm * 1"	0.12	50	112219
40 - 45 mm * 1 1/4"	0.13	50	112220
48 - 53 mm * 1 1/2"	0.14	50	112221
54 - 59 mm	0.15	50	112222
60 - 65 mm * 2"	0.16	50	112223
67 - 72 mm	0.18	50	112224

Tipo	Kg	Pezzi per confezione	Codice Articolo
76 - 81 mm * 2 ½"	0.26	25	115767
82 - 87 mm	0.28	25	112226
82 - 87 mm	0.28	25	115768
88 - 93 mm * 3"	0.29	25	115769
102 - 108 mm	0.31	25	115770
110 - 116 mm * 4"	0.34	25	115771
124 - 129 mm	0.37	25	115772
133 - 140 mm	0.73	10	112231
140 - 148 mm * 5"	0.77	10	112232
149 - 155 mm	0.8	10	112233
159 - 165 mm	0.83	10	112234
167 - 173 mm * 6"	0.87	10	112235
176 - 184 mm	0.92	10	112236
188 - 194 mm	1	10	112237
199 - 205 mm	1.04	10	112238
207 - 216 mm	1.1	10	112239
219 - 225 mm 8"	1.12	10	112240
244 - 250 mm	1.17	10	112242
267 - 273 mm 10"	1.29	10	112244
278 - 284 mm	1.36	10	112245
297 - 303 mm	1.42	10	112246