


BEAM BRACKET TKO F 80 - prosystemitalia.com

BEAM BRACKET TKO F 80 - Group A423

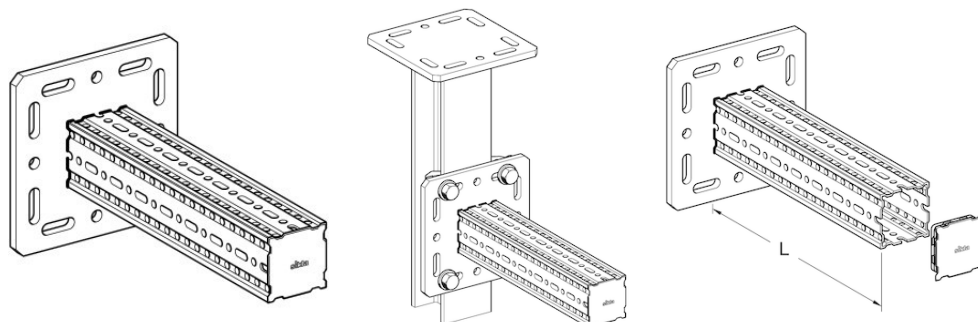

Application

Galvanised hollow-box-section with welded end-plate to serve as cantilever arm. May be used as a crossbar when combined with End Support STA/End Support WBD and 4 x Self Forming Screw FLS .

Scope of delivery

With pre-assembled End Cap ADK F 80.

Installation

Depending on the situation, different options are recommended:

- a) Directly to building structure: 4 x suitable wall anchors
- b) To traditional steel beams between 80 - 120 mm flange dimensions: 1x Assembly Set 5P M12 S
- c) To traditional steel beams > 120 flange dimension: with on-demand Adaptor Plate (tbc)
- d) To Steel Beams 100/120: with Bracket Plates FV 100/120 when positive mechanical connection required

Technical Data

Type	L [mm]	Dimensions of base plate [mm]	Slots in base plate for
TKO F80-400	400	220 x 220 x 12	M12
TKO F80-800	800	220 x 220 x 12	M12

Configuration: Base plate welded to Beam Section TP F 80.

Material:

- Base plate: Steel, HCP;
- Beam section: Steel, HCP.

Approvals

CE mark, according to EN 1090; MPA tested.



Tipo	Kg	Pezzi per confezione	Codice Articolo
TKO F 80 L=400mm	6.6	1	192788
TKO F 80 L=800mm	9.2	1	192795