


CANTILEVER BRACKET AK F 100 - prosystemitalia.com

CANTILEVER BRACKET AK F 100 - Group A820

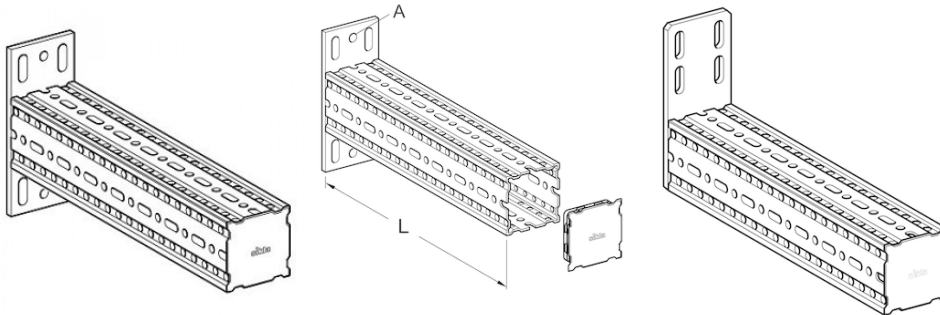

Application

Galvanised hollow-box-section with welded end-plate to serve as cantilever arm. May be used as a crossbar when combined with End Support STA and 4 x Self Forming Screw FLS. Durch die Rundlöcher in der Grundplatte ist eine direkte Anbindung an eingelassenen Ankerschienen möglich.

Installation

With 4 x Self Forming Screw FLS when fixed to another siFramo hollow-box-section. Alternatively with two suitable wall anchors through holes "A" when fixed directly to building structure.

Technical Data

Type	L [mm]	Dimensions of base plate [mm]	Langlöcher Grundplatte [mm]	A [mm]
AK F 100-400	400	210 x 100 x 8	20 x 11	14
AK F 100-800	800	210 x 100 x 8	20 x 11	14
AK F 100-1200	1200	210 x 100 x 8	20 x 11	14
AK F 100-E-600	600	185 x 100 x 8	20 x 11	-

Configuration: Plate welded to Beam Section TP F 100.

Material:

- Plate: Steel, HCP;
- Beam section: Steel, HCP.

Tipo	Kg	Pezzi per confezione	Codice Articolo
AK F 100 L= 400mm	5.66	1	113068
AK F 100 L= 800mm	10.06	1	113069
AK F 100 L=1200mm	14.68	1	113419
AK F 100-E L= 600mm	7.84	1	113070