


BEAM BRACKET TKO 120 - prosystemitalia.com

BEAM BRACKET TKO 120

- Group A620

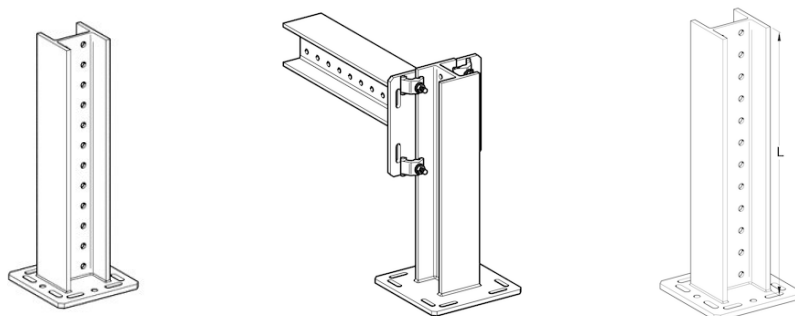

Application

Element for mounting to floors, ceilings or walls, or for assembling crossbars. Types TKO 120 x 1500, 2000 and 3000 are not suitable for cantilever arrangements.

Installation

Depending on the situation, different options are recommended:

- a) Fixation to building structure using 4 heavy duty anchors M12;
- b) Frictional connection to steel beams (flange width 80 - 120 mm) with Assembly Set 5P M12 S;
- c) Interlocking connection to further Beam Brackets by means of Bracket Plates FV100/120.

The \varnothing 13 mm holes following a 50 mm grid allow the combination with other products using M12 bolts.

Technical Data

Dimensions of base plate [mm]	Slots in base plate for	\varnothing of punched holes [mm]	Grid of holes [mm]
220 x 220 x 12	M12	13	50

Configuration: Base plate welded to IPB120.

Material: Steel, hot-dipped galvanised.

Approvals

CE mark, according to EN 1090.



Tipo	Kg	Pezzi per confezione	Codice Articolo
TKO 120 L= 350 mm	13.29	1	193150
TKO 120 L= 600 mm	19.9	1	193167
TKO 120 L= 800 mm	25.19	1	193174
TKO 120 L=1000 mm	30.48	1	193181
TKO 120 L=1500 mm	43.7	1	193198
TKO 120 L=2000 mm	56.93	1	193204
TKO 120 L=3000 mm	83.38	1	193105