


T-PLUS PER TUBI IN ACCIAIO - prosystemitalia.com

T-PLUS PER TUBI IN ACCIAIO - Group 2020A

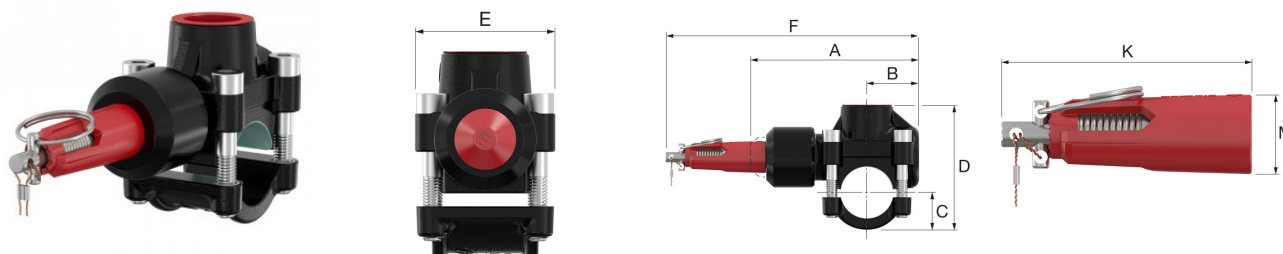

Application

A unique product for incorporating branches in existing installations (e.g. hospitals, industrial installations) without the slightest problem.

Saves installation time and costs.

Create branches while the system is still in operation.

Draining is not necessary, so no air and dirt cannot get into the system.

A perfect branch every time due to the trigger.

Easy to create a branch, even where space is restricted.

Optimum pipe seal.

Anti-corrosion coating.

Simple preparatory installation with click-in nuts (on models from 1½").

Single use (one shot) trigger mechanism. The trigger is included with the T-plus.

Temperature: 120°C

Pressure: PN25

Type	Ø ["]	Ø [mm]	Connection	Thickness adm. [mm]
T-plus DN 15 x 1/2"	1/2"	21,3	Rp 1/2"	2,0 - 3,25
T-plus DN 20 x 1/2"	3/4"	26,9	Rp 1/2"	2,0 - 3,25
T-plus DN 25 x 3/4"	1"	33,7	Rp 3/4"	2,0 - 4,05
T-plus DN 32 x 1"	1"¼	42,4	Rp 1"	2,0 - 4,05
T-plus DN 40 x 1"¼	1"½	48,3	Rp 1"¼	2,3 - 4,05
T-plus DN 50 x 1"¼	2"	60,3	Rp 1"¼	2,3 - 4,5
T-plus DN 65 x 1"¼	2"½	76,1	Rp 1"¼	2,6 - 4,5
T-plus DN 80 x 1"¼	3"	88,9	Rp 1"¼	2,9 - 5,0

Type	Dimensions							
	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F + 13 [mm]	K [mm]	M [mm]
T-plus DN 15 x Rp 1/2	100	28	19	67	47	166	66	21
T-plus DN 20 x Rp 1/2	113	34	21	77	50	179	66	21
T-plus DN 25 x Rp 3/4	115	35	25	83	56	181	66	21
T-plus DN 32 x Rp 1	130	38	29	102	69	196	66	21
T-plus DN 40 x Rp 1 1/4	165	55	35	123	83	231	66	21
T-plus DN 50 x Rp 1 1/4	167	55	43	136	83	233	66	21
T-plus DN 65 x Rp 1 1/4	190	66	52	153	83	256	66	21
T-plus DN 80 x Rp 1 1/4	190	66	58	168	83	256	66	21

Tipo	Kg	Pezzi per confezione	Codice Articolo
1/2" x 1/2" x 1/2"	0.59	20	90615
3/4" x 1/2" x 3/4"	0.84	20	90620
1" x 3/4" x 1"	1.05	20	90626
1 1/4" x 1" x 1 1/4"	1.76	10	90632
1 1/2" x 1 1/4" x 1 1/2"	3.23	5	90640
2" x 1 1/4" x 2"	3.38	5	90650
2 1/2" x 1 1/4" x 2 1/2"	3.98	5	90665
3" x 1 1/4" x 3"	3.98	5	90680