
P. Iva 03470750278 Reg.Imp. Ve 03470750278 Cap. Soc. Euro 90.000,00 REA Padova n ° 311219

www.prosystemitalia.com info@prosystemitalia.com



Y-STRAINER MOD. FY FM - prosystemitalia.com

## Y-STRAINER MOD. FY FM - Group Fyfm



## **Application**

Model adaptable to vertical or horizontal installations; allows to minimize the pressure drop and protects the pump and / or other components by the passage of foreign bodies inside the pipe. It has to be installed with two grooved couplings.

## **Technical data**

Working pressure: PN20

Working temperature: from - 10°C to max + 110°C

Holes diameter

from 2" to 5": Ø 1,6 mm span 2,4 mm


from 6" to 8": Ø 3,2 mm

## Material:

Body: ductile iron ASTM A536Cover: ductile iron ASTM 536Drain: ductile iron ASTM A536

- Gasket: EPDM

- Surface treatment: red painted RAL 3000

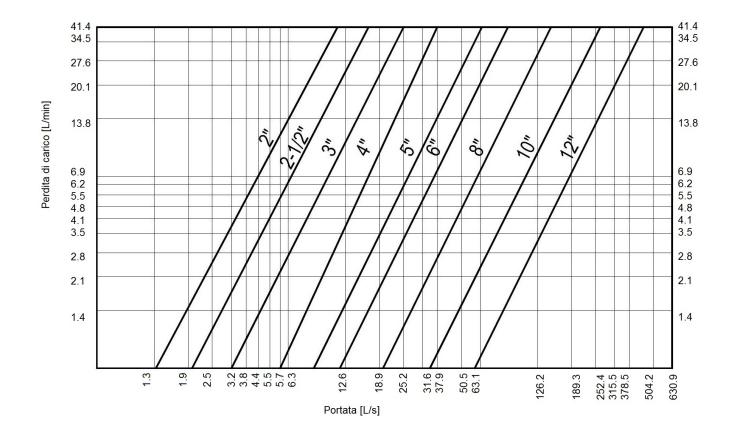

Tipo	Kg	Pezzi per confezione	Codice Articolo
76,1 mm 2''½	6.4	1	FY076FM
114,3 mm 4"	14.5	1	FY114FM
139,7 mm 5''	22.7	1	FY139FM