


CHECK VALVE VR FM - prosystemitalia.com

CHECK VALVE VR FM - Group Vrfm



Application

Grooved check valve, allow the flow in one direction. Once the valve is open the section is totally free. The valves VR can be installed in horizontal or vertical position (flow upwards only).

Technical Data


Working pressure: 24 bar

Working temperature: from -10°C to +110°C (EPDM)

NB	Ø [in]	Ø [mm]	A [mm]
50	2"	60,3	169
65	2" 1/2	76,1	183
80	3"	88,9	198
100	4"	114,3	218
125	5"	139,7	248
150	6"	168,3	270
200	8"	219,1	325

Part	Type
1Corpo	ghisa ASTM A 536
2Sede	Bronzo
3Clapet	Inox AISI 304
4Tenuta	EPDM
5Anello di bloccaggio	Inox AISI 304
6Guarnizione	EPDM
7Molla	Inox AISI 304
8Cerniera	Inox AISI 304
9Bullone	Inox AISI 304

Part	Type
10Dado	Inox AISI 304
11Orifizio 1/4" NPT	acciaio al carbonio
12Orifizio 1/2" NPT	acciaio al carbonio

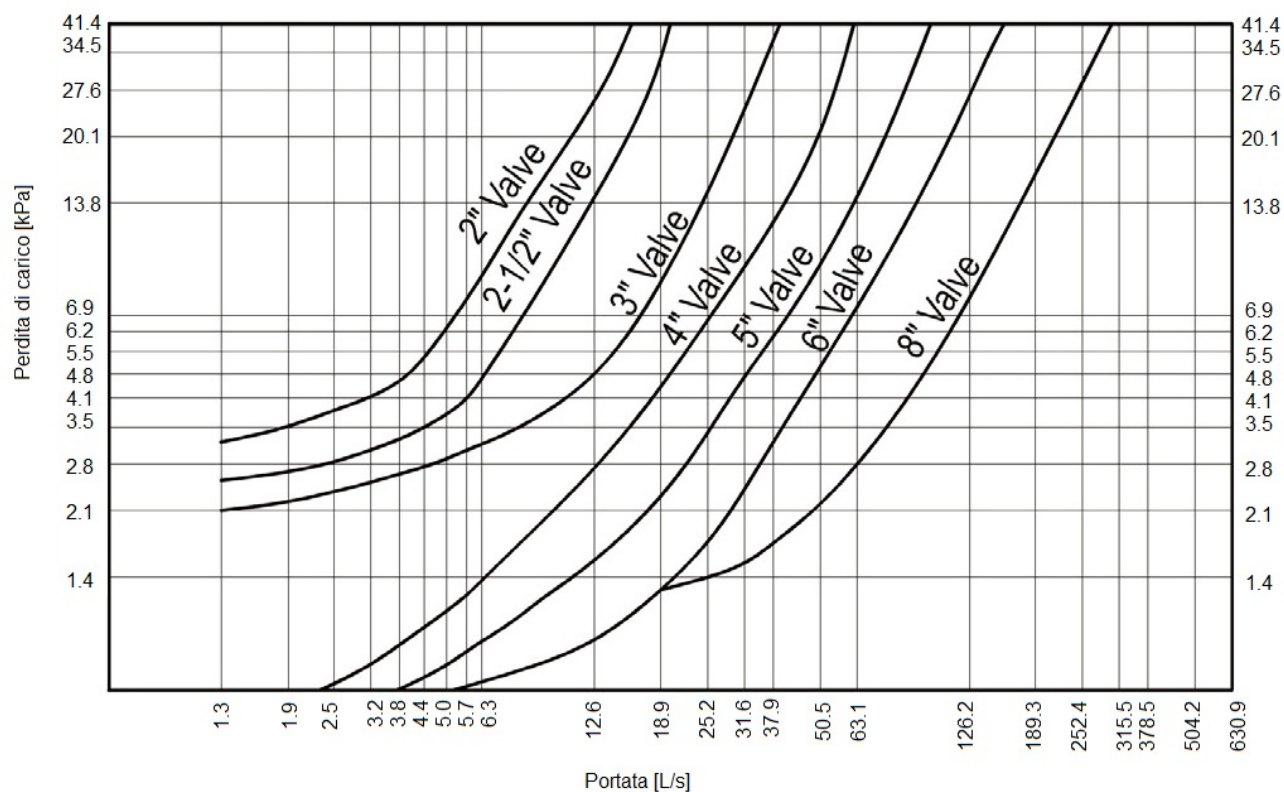

Tipo	Kg	Pezzi per confezione	Codice Articolo
60,3 mm 2"	2.5	1	VR060FM
76,1 mm 2"½	4	1	VR076FM
88,9 mm 3"	6	1	VR089FM
114,3 mm 4"	9	1	VR114FM
139,7 mm 5"	15	1	VR139FM
168,3 mm 6"	19	1	VR168FM
219,1 mm 8"	35	1	VR219FM