


SPRINKLER PENDENT - QUICK RESPONSE - RTI > 50 - prosystemitalia.com

SPRINKLER PENDENT - QUICK RESPONSE - RTI > 50

- Group 505

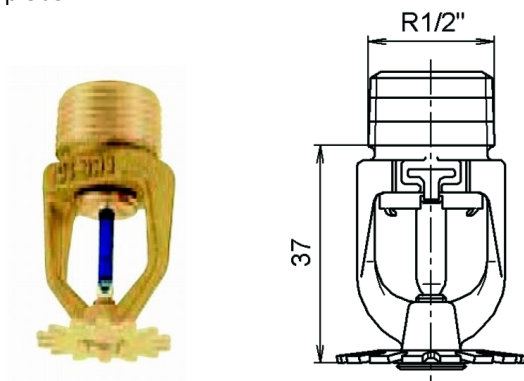

Application

Sprinkler pendent, made of brass, fast response, threaded connection 1/2" and 3/4" K-factor 80 or 115 with glass bulb. Made for the jet directed downwards against the deflector.

Particularly suitable for dry systems.

Technical Data

Characteristics: spray sprinkler, pendent

Response sensitivity: fast RTI < 50

Max working pressure: 12,0

Min request pressure: 0,68 bar

k factor: 80; 115

Material:

- Sprinkler body: brass (on request chrome-plated version)
- Deflector: brass (on request stainless steel version);
- Glass bulb: borosilicate glass;
- Threaded pin: brass.

Approvals

1/2" version: certified CE and FM.

3/4" version: certified CE.



Tipo	Kg	Pezzi per confezione	Codice Articolo
1/2" K80 57 °C	0	1	842970
1/2" K80 68 °C	0.05	50	842971
1/2" K80 79 °C	0	1	842972
1/2" K80 93 °C	0	1	842973
1/2" K80 141°C	0	1	842974
3/4" K115 57 °C	0	1	842980
3/4" K115 68 °C	0.05	1	842981
3/4" K115 79 °C	0	1	842982
3/4" K115 93 °C	0.05	1	842983
3/4" K115 141°C	0	1	842984