


DELUGE VALVE FSX WITH HYDRAULIC ACTUATION - prosystemitalia.com

DELUGE VALVE FSX WITH HYDRAULIC ACTUATION -

Group 533



Application

The deluge system is normally used both for deluge systems to protect areas and large surfaces and systems to protect localized areas and surfaces such as cooling tanks and water blades. The deluge system is also compatible for use in foam systems at low, medium and high expansion. The sprinklers downstream of the valve are open.

Application on any type of installation.

Scope of delivery

The standard version comes fully assembled and complete with body deluge valve (connection with flanged or grooved), trim, gauges and pressure switch, pneumatic actuation. Are excluded from the supply gate valves and the water motor.

Technical Data

Actuation:pneumatic

Max permissible pressure: 16 bar

Working temperature: Max 60°C

Water supply pressure according to the flow rate:

min. 2.0 bar: up to 5 m/s

min. 2.5 bar: 5-7 m/s


min. 3.0 bar: 7-8 m/s

min. 3.8 bar: 8-10 m/s

Alarm: dry contact 1 NC, 1 NO

Drain valve: K2, K20

Flange connection dimensions: DIN 2501

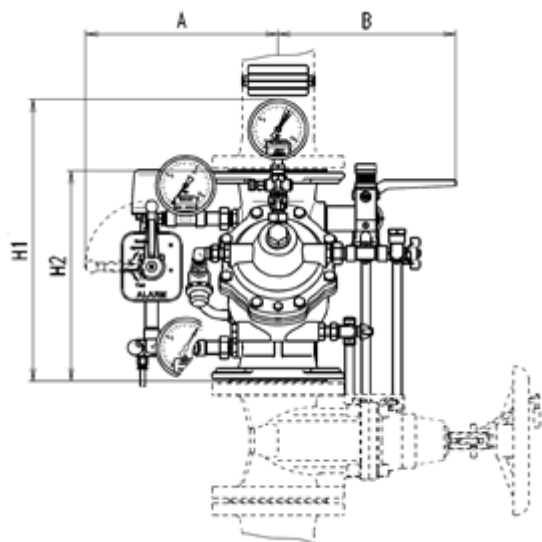

DN	Equivalent Length [m]	A [mm]	B[mm]	H1 [mm]	H2 [mm]
50	3,1	310	230	430	300
80	7,1	315	295	460	320
100	12	335	310	500	350
150	26,9	355	390	580	480
200	23,8	385	420	670	600

Approvals

CE, VdS, Gost-R, FM.



Tipo	Kg	Pezzi per confezione	Codice Articolo
DN 50 F/F	28.1	1	850084
DN 80 F/F	40.3	1	850102
DN 100 F/F	49.6	1	850120
DN 150 F/F	89.9	1	850138
DN 200 PN10 F/F	0	1	850156

Tipo	Kg	Pezzi per confezione	Codice Articolo
DN 200 PN16 F/F	162.8	1	850172
DN 50 F/F	33.8	1	850086
DN 80 F/F	49.5	1	850104
DN 100 F/F	62.3	1	850122
DN 150 F/F	107.4	1	850140
DN 200 PN10 F/F	0	1	850158
DN 200 PN16 F/F	187	1	850174