


PIVOT JOINT GE F 80 - prosystemitalia.com

## PIVOT JOINT GE F 80

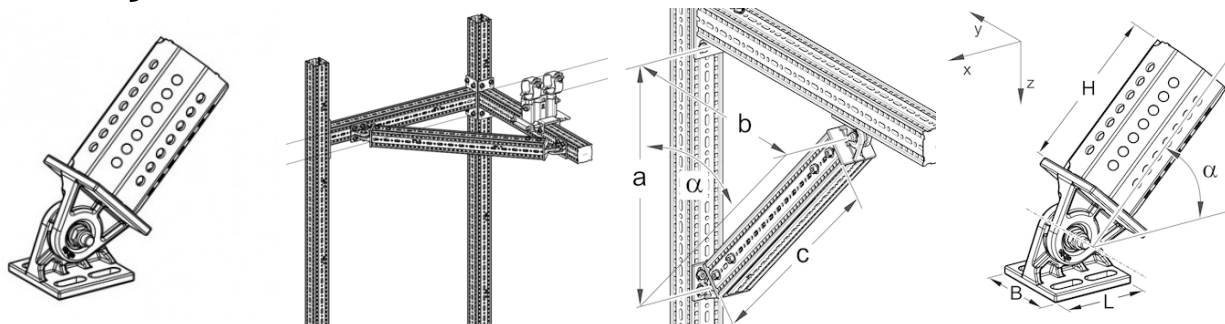

### Application

Applicable as a bracing element for single-arm cantilevers in conjunction with siFramo 80 section, and for the knee-brace reinforcing of siFramo 80 frame constructions. The pivot can be installed with angles from 25° to 155°.

### Installation

Attachment of Joint GE F 80 to Beam Section TP F 80 by means of 4 Self Forming Screws FLS F at the base plate. The support profile TP F 80 plugged onto the octagon is also attached by means of 4 Self Forming Screws, so 8 Self Forming Screws are necessary in total. The cutting length of the support profile can be determined by the table below-mentioned. After installation at the desired angle the screws have to be tightened with 40 Nm.

### Technical Data

Material: Steel, HCP.

Type	Height H [mm]	Length L [mm]	Width B [mm]	Angle α
GE F 80 - 80	140	80	80	25° - 155°

Cutting length c of support profile between two joints:

	b [mm] 1000	b [mm] 1500	b [mm] 2000	b [mm] 2500	b [mm] 3000
α	c [mm]	c [mm]	c [mm]	c [mm]	c [mm]
25°	2155	3340	4525	5710	6890
30°	1810	2810	3810	4810	5810
35°	1565	2435	3305	4180	5050

40°	1380	2160	2940	3720	4495
45°	1245	1955	2660	3370	4075
50°	1145	1800	2450	3100	3755
55°	1060	1670	2285	2895	3505
60°	1000	1580	2155	2730	3310
65°	950	1500	2055	2605	3155

a: vertical length from centerline of joint to bottom of profile at connection

b: horizontal length of cantilever from connection to centerline of joint

c: cutting length of support profile between two joints

$\alpha$ : angle at the opposite of the vertical bracing

<b>Tipo</b>	<b>Kg</b>	<b>Pezzi per confezione</b>	<b>Codice Articolo</b>
	2.1	1	113835
GE F 80	3	1	113834