


MORSETTO TCS F - prosystemitalia.com

MORSETTO TCS F

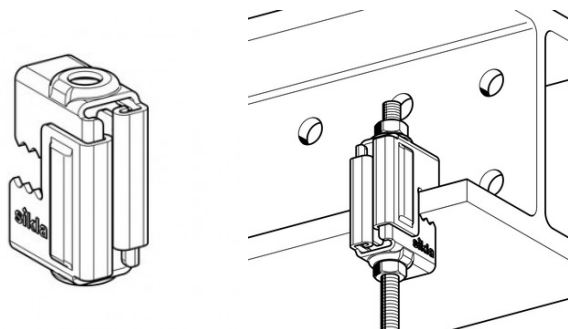

Application

The TCS F Beam Clamp is a solid element designed for connecting pipes, ducts and other equipment to steel sections (UB, UC, PFC sections). A self-locking mechanism allows positioning by using one hand. The TCS F Beam Clamp can be used both for single drop rods and, in pairs, for trapezes.

Installation

Place the beam clamp around the flange and push the two components together. Pass the threaded rod through the beam clamp and tighten both nuts (tightening torque 10 Nm).

Follow the assembly instructions!

For FM systems, M10 only!

Technical Data

The nominal loads stated below apply to new beam clamps in combination with un-damaged beam flanges.

Nominal load: 3.5 kN

Material: high-tensile steel, zinc-plated

Clamping range on parallel flange: 0-30mm

Approvals

The TCS F Beam Clamp is compliant with VdS and FM regulations for Fire Sprinkler Systems. VdS approval G418017

Tipo	Kg	Pezzi per confezione	Codice Articolo
TCS F Ã 10,5	0.21	50	116488