


PROCLEAN - prosystemitalia.com

PROCLEAN

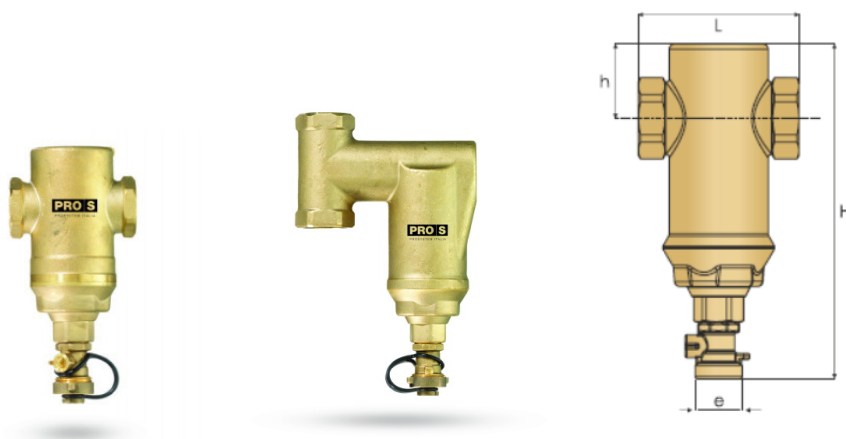

Application

The online processors Proclean is used to capture sludge in hydraulic circuits on closed heating or air conditioning systems

Equipped with a special MicroSmart Screen stainless steel mesh.

PROvent must be installed with the pipe in a horizontal / vertical position.

Technical data	Provent
Body:	Brass
Connections:	threaded 1"-2"
Max. operating temperature:	110 ° C
Max. operating pressure:	10 bar

Model	Position	H [mm]	h [mm]	L [mm]
3/4"	orizz.	174	40	85
1"	orizz.	174	40	85
1"¼	orizz.	174	41	88
1"½	orizz.	198	45	99
2"	orizz.	198	46	99
1"	vert.	214	86	137

Tipo	Kg	Pezzi per confezione	Codice Articolo
Proclean 3/4"	1.32	6	32470

Tipo	Kg	Pezzi per confezione	Codice Articolo
Proclean 1"	1.7	1	32471
Proclean 1 1/4"	1.7	1	32472
Proclean 1 1/2"	1.7	1	32473
Proclean 2"	1.7	1	32474
Proclean 1"	3.3	1	32476