


PIASTRA ANGOLARE EV CC 41-2 - prosystemitalia.com

PIASTRA ANGOLARE EV CC 41-2

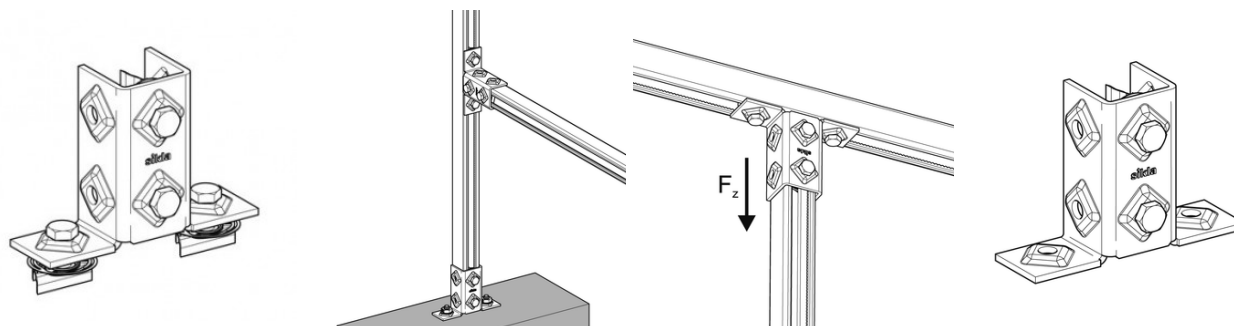

Application

Pre-assembled connecting element for three-dimensional frame structures, optimised for linking channels of the 41 series at an angle of 90°. Preferably used in combination with 41/41 square channels. Version W is used for connection to wall, floor or ceilings. The adjustment for the channel opening could still be chosen.

Fast-Technique for 90° joints of Channel System 41

Locks automatically when being put in place and supports its own weight.

Secure, form-locking, non-positive connection. Serrated Channel Nut with Hexagon Bolt M10.

Ideal shaping for high stiffness.

The proven Sikla rhomb guarantees a secure torque and preload force.

Installation

To be used in pairs.

Technical Data

Max. per. working load:

$F_z = 5 \text{ kN}$

- $F_z = 10 \text{ kN}$

Tightening torque: 50 Nm

Material: Steel, HCP.

Tipo	Kg	Pezzi per confezione	Codice Articolo
EV CC41-2 HCP	0.7	10	117457
EV CC41-2 W HCP	0.58	10	117459